



The following figure shows the connection between the IP phone and the Sennheiser wireless headset.

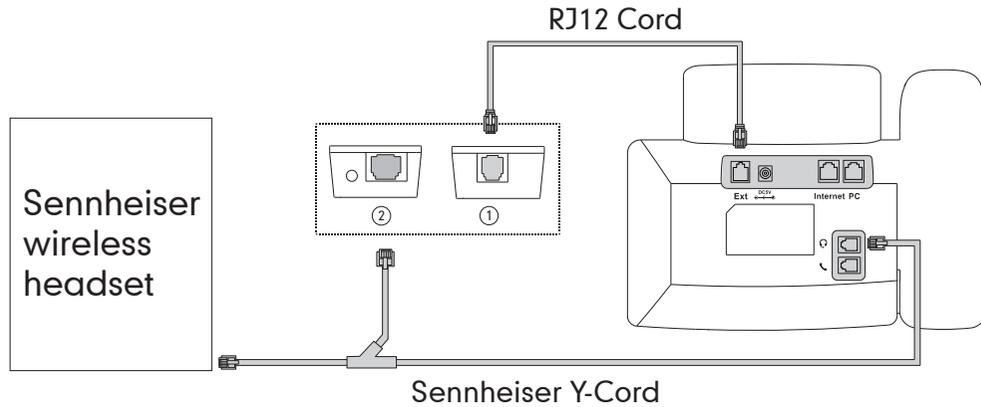

**Note:** The sennheiser wireless headset must be running the latest firmware of the DW-Office series (version 96 or later) !

The following figure shows the connection between the IP phone and the the Plantronics wireless headset.

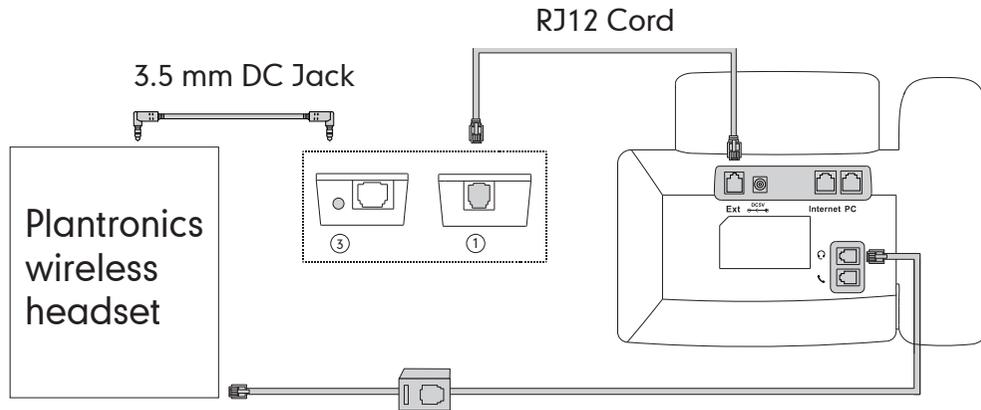

This cord is provided by Plantronics.



# Wireless Headset Adapter —EHS36




## User Guide (V1.3)


## Introduction

The Wireless Headset Adapter—EHS36, is perfect for connecting Yealink SIP-T48G/T46G/T42G/T41P/T38G/T28P/T26P IP phones and wireless headsets, such as Sennheiser/Jabra(GN Netcom) and Plantronics headsets.

## Packaging Contents

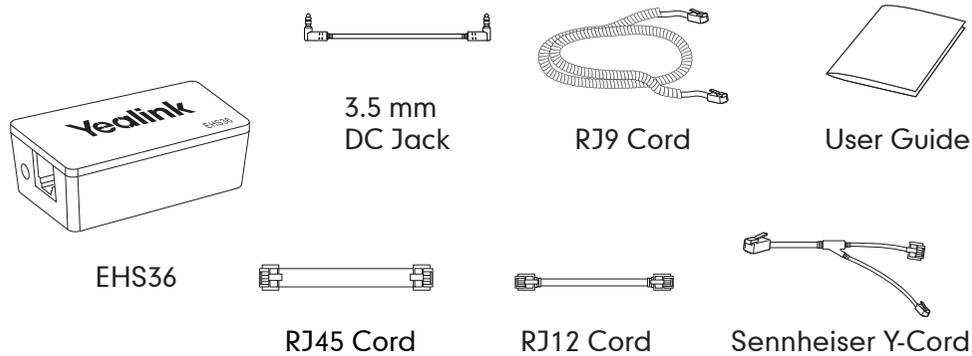

## Port Description

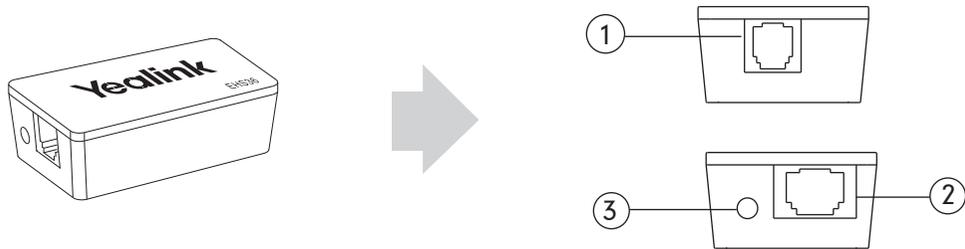

**Port ①:** Connect this port and the IP phone EXT/EHS port or Expansion Module EXT port (the expansion module has been connected to the phone) using the RJ12 cord.

**Port ②:** Connect this port and the Jabra(GN Netcom)/Sennheiser Wireless headset using the RJ45 cord.

**Port ③:** Connect this port and the Plantronics Wireless headset using the 3.5 mm DC jack.

## Cord Description

In addition to the cords mentioned in the Port Description section, the RJ9 Cord and the Sennheiser Y-Cord are also provided.

**RJ9 Cord:** For the audio connection between the IP phone headset port and the Jabra (GN Netcom) wireless headset.

**Sennheiser Y-Cord:** For the audio connection between the IP phone headset port, Wireless Headset Adapter and the Sennheiser wireless headset.

## Connecting IP Phone and Headset

This section introduces the connection between SIP-T48G/T46G/T42G/T41P/T38G/T28P/T26P IP phones and the wireless headset. The following figures take the SIP-T28P/T26P IP phone as an example.

The following figure shows the connection between the IP phone and the Jabra (GN Netcom) wireless headset.

