

SIP RGB Strobe

When installed, the wall-mounted SIP RGB Strobe operates as a visual alerting device. The device can be set up as part of a ring group (call group) with the Strobe engaged as notification of incoming calls.

The SIP RGB Strobe may also be activated by being part of a Multicast group. When audio is detected on a specific Multicast address and port, the strobe will activate.

Through a web page setup, you can have the SIP Strobe respond to message waiting signals by blinking. When the message has been heard, the strobe stops blinking.

Multiple colors, Blink rate and brightness can be selected for each of the different activation methods

Users may also use CyberData's HTTP command set to directly access the strobe's functions.

Features

- Meets ADA requirements for telephony signaling and notification
- Multiple colors, Blink rate and brightness can be selected for each of the different activation methods
- Program or listen to up to 10 multicast addresses
- SIP activation
- Mailbox Message Waiting Indication
- Multicast activation
- Cisco SRST support
- Event-controlled relay
- Tamper sensor
- Web-based setup
- PoE-powered

Use areas include:


- Sales and support mailbox indication
- Classrooms
- Banks or financial institutions
- Court rooms
- Manufacturing warehouses
- Office
- Indoor only



Specifications

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Power Input	PoE 802.3af compliant or +8 to +12VDC @ 1000mA Regulated Power Supply
Flash rate	5 user-defined scenes
LED MTBF	100,000 Hours
On-Board Relay	1A at 30 VDC
Operating Temperature	-10° C to 50° C (14° F to 122° F)
Payload Types	G711, A-law and μ -law
Dimensions	Length: 4.5 inches [115 mm] Width: 2.1 inches [55 mm] Height: 4.5 inches [115 mm]
Warranty	2 years limited
Weight	1.0 lbs. (0.45 kg)
Boxed Weight	2.0 lbs. (0.90 kg)
Part Number	011376

SIP RGB Strobe

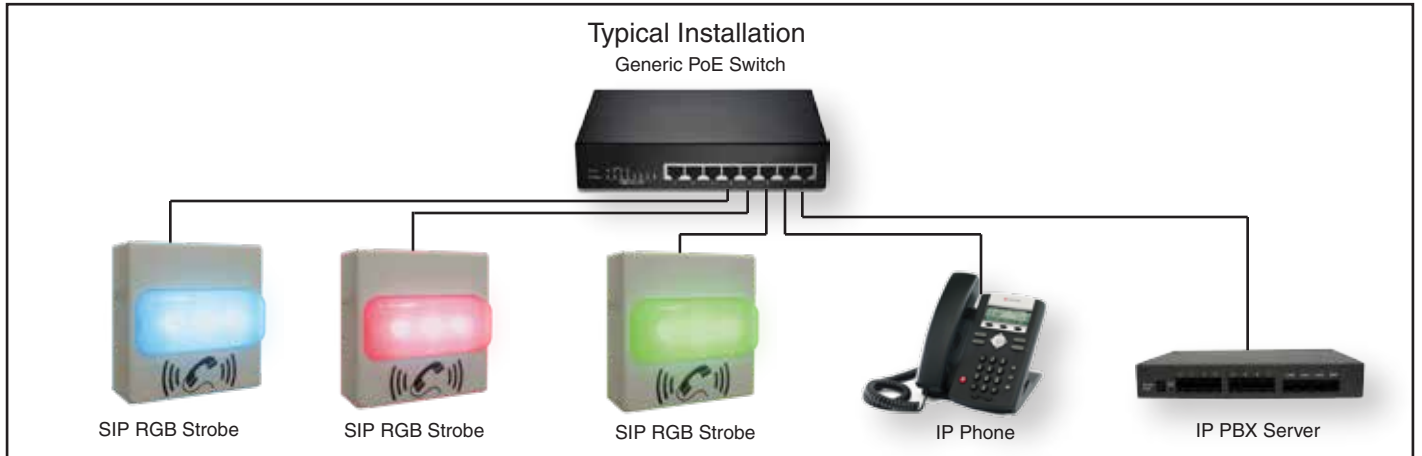

Mounting Options

