

# NetVanta 6360

## Integrated Layer 2/3 Carrier Ethernet IP Business Gateway

### Product Features

- Universal edge device supporting modular Layer 2/3 Carrier Ethernet services with four Gigabit combo interfaces (copper or small form factor SFP)
- All Ethernet interfaces include carrier Ethernet functionality
- Multiple WAN interface options:
  - Quad bonded VDSL2
  - Quad and octal SHDSL (EoCu)
  - Copper and fiber gigabit Ethernet
- Hardware-based SLA monitoring with automated data exporting
- MEF 9/14 certified supporting standard Ethernet OAM
- Layer 2 OAM (Y.1731 CFM, Y.1731 PM) and Layer 3 OAM (TWAMP) support
- Full-featured IP router for data support and Internet access
- Auto-failover and recovery for improved service robustness
- Plug-and-play auto line detection for easy installation
- *RapidRoute* technology for increased performance
- Stateful inspection firewall for network security
- Quality of Service (QoS) for delay sensitive traffic like VoIP
- Supports 802.1q Virtual LAN (VLAN) trunking
- Utilize recognisable Command Line Interface (CLI)
- Network Address Translation (NAT) for IP address concealment
- Supports terminal and facility MAC-swap loopback to validate service turn up and trouble-shooting
- Voice Quality Monitoring (VQM) ensuring VoIP call quality
- Enterprise Session Border Control (eSBC) to normalize, secure and troubleshoot SIP to SIP communications
- Flexibility to meet all levels of VoIP migration

ADTRAN's NetVanta® 6360 is an integrated Layer 2/3 carrier Ethernet services IP Business Gateway providing a universal edge device supporting any mix of Layer 3 IP VPN, Layer 2 VPN (E-LINE/E-LAN), voice, and internet access services. Many carriers are facing the customer demand for receiving carrier Ethernet services and supporting Layer 3 services, which often times requires multiple hardware platforms. ADTRAN's NetVanta 6360 is designed to alleviate this burden providing the functionality of both in a single platform.

#### Modular Hardware

The NetVanta 6360 is a modular platform for global deployments with WAN interface options for quad bonded VDSL2, quad and octal SHDSL (EoCu). There are five Gigabit interfaces available—all with Carrier Ethernet functionality—one SFP only, one combo (Copper or SFP), and three copper.

#### Hardware-based SLA

The NetVanta 6360 supports SLA-based services such as small cell backhaul and hosted enterprise services though hardware-based SLA monitoring with automated data export offering the flexibility to fit your service delivery model.

#### Converging Layer 2 and 3 Services

The NetVanta 6360 eases the transition from Layer 3 IP VPN services delivered over TDM-based PPP/FR circuits to Ethernet-based services delivered over broadband access networks (EoX, VDSL2, GPON, point-to-point Ethernet). Key carrier Ethernet features:

- MAC-swap loopbacks
- Y.1731 carrier Ethernet OAM
- MEF-compliant traffic management

#### Redundancy

In the event that a single EFM loop fails, the NetVanta 6360 will continue to operate on the remaining loop, providing additional resiliency. Once the failed loop is operational again, the NetVanta 6360 will automatically detect its availability and will auto-recover to the original configuration.

#### VoIP Gateway

The NetVanta 6360 utilizes SIP for VoIP applications, providing interoperability with industry-leading soft switches, feature servers, and gateways. Acting as a gateway, the Total Access 900e converts IP signaling from the carrier into traditional TDM analog and digital voice services. This functionality allows the NetVanta 6360 to deliver voice services to both IP phones and traditional telephony equipment simultaneously.

For customers implementing a hosted PBX or IP Centrex service, the NetVanta 6360 is ideal for providing customers additional analog ports necessary to support their remaining analog phones, fax machines, or modems. The NetVanta 6360 supports many popular calling features such as caller ID, call hold, forward, transfer, and call waiting. Voice Activity Detection (VAD) and silence suppression are supported to ensure reliable VoIP call quality.

#### Remote Survivability

In addition, the NetVanta 6360 can act as a registrar and Back-to-Back User Agent (B2BUA) or as a SIP-transparent proxy to facilitate remote survivability and NAT traversal. In the event of a service interruption on the wide area network or if the carrier's call agent were to become unavailable, calls may continue locally at the customer premises between IP-based or analog phones. In addition, the embedded FXO or T1/PRI port can be used as a survivable interface for outbound calls to the PSTN.

#### Quality of Service Flexibility

The NetVanta 6360 offers QoS support for delay-sensitive traffic like VoIP or video, and enhanced QoS support for Ethernet WAN connections providing the ability to prioritize traffic by VLAN. This solution also delivers packet flow capabilities certified compliant per the Metro Ethernet Forum. These packet flow capabilities offer the traffic classification and bandwidth profiling functionality required to offer customers a flexible, tiered service offering with up to eight class of service queues.



# NetVanta 6360

Integrated Layer 2/3 Carrier Ethernet  
IP Business Gateway

## Product Specifications

### Physical Interfaces

#### Modular WAN Options

- Quad Bonded VDSL2
- Quad and Octal SHDSL (EoCu)

#### Gigabit Ethernet

- One Combo (Copper or SFP)
- One SFP only
- Three Copper
  - All Ports Included in Chassis
  - All Ethernet Interfaces Include Carrier Ethernet Functionality
- Full Duplex    ■ RJ-45
- WAN/LAN support
- Supports 802.1q VLAN Trunking

### Processor and Memory

- RAM: 512 MB RAM
- Flash: 256 MB Flash

### Digital Voice

- PRI, T1, CAS support
- Signaling Methods
  - E&M Wink    □ E&M Immediate
- Feature Group D    ■ RJ-48C

### Analog Voice

- 8, 16, and 24 FXS POTS via 50-pin Amphenol
- 68.5 Vrms with 20VDC Offset Maximum Ring Voltage
- Sinusoidal Ringer Waveform
- 48 V, Nominal On-hook Battery Voltage
- 30 mA, Nominal Loop Current
- FXS 2-wire Impedances
  - 600Ω    □ 900Ω
  - 600Ω +2.16μF    □ 900Ω +2.16μF

### Craft

- DB-9

### VoIP

- SIP

### Packet-based Voice Resources

- CODECs
  - G.711-64k PCM    □ G.729a-8k CS-ACELP
- G.168 Echo Cancellation
- Up to 64ms Echo-tail Length
- Supports up to 72 Channels DSP
- Supports 60 T.38 Sessions

### Media Stream

- RTP/UDP/IP (RFC 3550)
- RTP Payload for DTMF Digits (RFC 2833)
- Supports Port-to-port Hairpin Call
- SDP (RFC 2327)

### VQM

- Packet Capture (PCAP)    ■ MOS prediction
- Jitter, Delay and Packet Loss
- Past and Active Calls

### NAT Traversal and Remote Survivability

- B2BUA    ■ SIP Registrar for IP Phones
- SIP Proxy with Survivability
- Transparent/Stateful/Outbound

### Tone Services

- Local DTMF Detection
- Local Tone Generation
  - Dialtone    □ Busy    □ Call Waiting
  - Alternate Call Waiting    □ Receiver Off Hook
- Ringing
  - Distinctive Ring

### Calling Feature Support

(Varies with Feature Server/Gateway)

- Caller ID
  - Name and Number (MDMF, SDMF)
  - Call Waiting Caller ID
- Voice Mail
  - Stutter dialtone
  - Visual Message Waiting Indicator (VMWI)
- Call Hold
- Call Forward
  - Busy Line    □ No Answer
- Call Transfer
  - Blind, Attended
- Call Waiting    ■ Distinctive Ring
- Do Not Disturb    ■ Three-way Calling
- Call Return    ■ Speed Dial
- 3-way Conferencing (3WC)

### Management and Utilities

- Familiar Command Line Interface (CLI)
- n-Command MSP Support    ■ SNMP v3
- SYSLOG Logging
- Telnet, Craft/Console Port, SSH, Ping, Trace Route, NTP
- TCL Scripting    ■ Policy Statistics
- Email Alerts (SMTP)



---

# NetVanta 6360

Integrated Layer 2/3 Carrier Ethernet  
IP Business Gateway

---

## LEDs

- Status
- EFM
- Voice
- T1/E1 2
- Module
- USB
- T1/E1 1

## Quality of Service (QoS)

- Low Latency and Weighted Fair Queuing (WFQ)
- DiffServ Packet Marking and Recognition
- Frame Relay Fragmentation
- Traffic Monitoring (NetFlow 9)
- Weighted Random Early Detection (WRED)

## Security

### Firewall

- Stateful Inspection Firewall
- Denial of Service (DoS) Protection
- Access Control Lists
- Application Level Gateways (ALGs)
- Packet Filtering

## Network Address Translation

- Basic NAT (1:1), NAT (Many:1), and 1:1 Port Translation
- NAT-compatible SIP ALG

## Protocols

- eBGP/iBGP
- RIP (v1 and v2)
- GRE
- EFM
- Multi-VRF CE
- RFC 1483
- OSPF
- Demand Routing
- IGMP v2
- Layer 3 Backup
- PPPoE
- Multihoming

## Secure Management

- Multi-level Access Control
- TACACS+
- RADIUS AAA
- SSH CLI and SSL GUI
- Port Authentication (802.1x)

## Content Filtering

- Inherent URL Filter
- Top Website Reports
- Integration with Websense

## DSL Features

- Variable Rate Bonding for the SHDSL Loops
- Auto-failover and Recovery
- Plug-and-play Auto-line Detection
- ITU-G.991.2-2003, Annex A&B-SHDSL

## Ethernet Features

- IEEE 802.1p Priority Marking
- IEEE 802.1d Dynamic/Transparent Bridging
- IEEE 802.1Q VLAN Tagging
- IEEE 802.3u Ethernet
- MEF 9/14
- Network Synchronization (SyncE)

## Ethernet Services Support

- Priority Queuing of Traffic Based on VLAN Priority
  - Supports Eight Class of Service Queues
  - Per UNI Port, CE VLAN ID (C-Tag) and/or CE VLAN P-bits, DSCP Fields
- Single/Double Stack VLAN/s (Q-in-Q)
  - Manipulation Based on 802.1p and DSCP Fields
  - STAG TPID Provisioning Supports 802.1ad and 802.1Q Standards
  - Port-based Service Support
- Services Scale and Flexibility
  - MEF 9, 14 compliant EPL, EVPL
  - Configurable EtherType and TPID for Service Flexibility
  - VLAN IDs 0–4095; EVC Configurable in the Range of 1–4,094
  - Configurable MTU Mini Jumbo Frame Support (2,000 Bytes)
  - 16 kbps Active MAC Address; Ability to Disable MAC Learning (32 kbps Support Future Software)
  - Ingress Policers (tr3CM), CIR and EIR Settings to 64 kbps Granularity, Configurable Burst Through EBS, CBS Settings
  - Egress Shaping Per Port (Per Port Per Queue)
  - Up to 8 Shapers Per Interface

## Fault and Performance Management

- IEEE 802.3ah Link OAM
- ITU-T Y.1731 CFM, PM
- Supports OAM Management Status and Loopback Messaging
- Network Monitoring Enhancements



ADTRAN, Inc.  
 Attn: Enterprise Networks  
 901 Explorer Boulevard  
 Huntsville, AL 35806  
 P.O. Box 140000  
 Huntsville, AL 35814-4000

256 963-8000  
 256 963-8699 fax

**General Information**  
 800 9ADTRAN  
 info@adtran.com  
 www.adtran.com

**Pre-Sales Technical Support**  
 888 423-8726  
 application.engineer@adtran.com  
 www.adtran.com/presales

**Post-Sales Technical Support**  
 888 423-8726  
 support@adtran.com  
 www.adtran.com/support

**Where to Buy**  
 888 423-8726  
 channel.sales@adtran.com  
 www.adtran.com/where2buy

**ProServices<sup>SM</sup>**  
 888 874-2237  
 proservices@adtran.com  
 www.adtran.com/proservices

**Global Inquiries**  
 256 963-8000  
 256 963-6300 fax  
 international@adtran.com


ADTRAN believes the information in this publication to be accurate as of publication date, and is not responsible for error. Specifications subject to change without notice. ADTRAN and NetVanta are registered trademarks of ADTRAN, Inc. and its affiliates in various countries. All other trademarks mentioned in this document are the property of their respective owners.

ADTRAN warranty duration and entitlements vary by product and geography. For specific warranty information, visit [www.adtran.com/warranty](http://www.adtran.com/warranty)

ADTRAN products may be subject to U.S. export controls and other trade restrictions. Any export, re-export, or transfer of the products contrary to law is prohibited. For more information regarding ADTRAN's export license, please visit [www.adtran.com/exportlicense](http://www.adtran.com/exportlicense)

# NetVanta 6360

Integrated Layer 2/3 Carrier Ethernet  
 IP Business Gateway

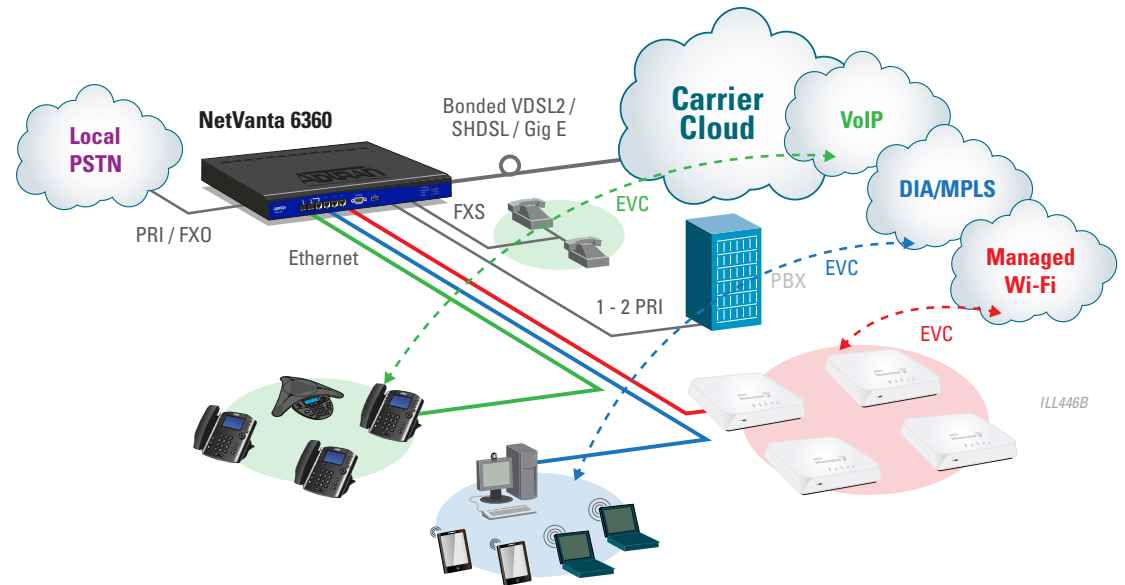

## Product Specifications

### Environment

- Operating Temperature: -32° to 122 °F (0° to 50 °C)
- Storage Temperature: -4° to 158 °F (-20° to 70 °C)
- Relative Humidity: Up to 95%, Non-condensing
- Maximum Altitude: 10,000 Feet (3.05m)

### Physical and Power

#### Chassis

- 1U, 19 in. (48.26 cm)  
Rackmountable Metal Enclosure

#### Dimensions

- 1.72 in. x 17.22 in. x 13.4 in. (H x W x D)  
(4.37 cm x 43.74 cm x 29.21 cm)

#### Weight

- 7 lbs. (3.2 kg)

#### Power

- 110 – 240 VAC, 50/60 Hz
- 48 VDC

### Agency Approvals

- FCC Part 15, Class A
- FCC Part 68
- UL 60950-1
- EN 50950
- AS/N25 60950
- ACA 5016
- CSA C22.2 No 950-95
- CE Mark
- Industry Canada CS03
- ETSI 300
- RoHS

## Ordering Information

Equipment	Part No.
NetVanta 6360 16 FXS	47006364F1
NetVanta 6360 24 FXS	47006366F1
NetVanta CE Quad SHDSL EFM Module	17406368F1
NetVanta CE Quad VDSL2 EFM Module	17406369F1
NetVanta 1000BaseSX SFP Transceiver	1200480E1
NetVanta 1000BaseLX SFP Transceiver	1200481E1
NetVanta 6360 Eight-hour, Wallmount/Rackmount	1175044L1
NetVanta 6360 Eight-hour, Wallmount	1175044L2



TL19.1270



TL 9000 TELECOMMUNICATIONS QUALITY FOR A BETTER ENVIRONMENT

ADTRAN is an ISO 9001, ISO 14001, and a TL 9000 certified supplier.

647006364F1-8A May  
 Copyright © 2014 ADTRAN, Inc.  
 All rights reserved.