

Ceiling Tile Drop-In Auxiliary Analog Speaker

Brand New Design


This Ceiling Tile Drop-in Auxiliary Analog Speaker is an option for the CyberData SIP-enabled IP Speaker to extend the coverage area. When connecting this Analog speaker to the CyberData SIP-enabled IP Speaker, the total speaker wattage is the same. However, by adding this analog speaker, additional coverage can be realized.



Specifications

Audio Output	802.3af - SPL 109.2 dB @ 1 meter 802.3at - SPL 111.9 dB @ 1 meter
Operating Temperature	-10° C to 50° C (14° F to 122° F)
Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Power Input	PoE 802.3af/802.3at
Payload Types	G711, A-law and μ -law
Dimensions (Unit)	Length: 12 in. [304.8 mm] Width: 3.23 in. [82.04 mm] Height: 23.75 in. [603.25 mm]
Dimensions (Boxed)	Length: 16.25 in. [412.75 mm] Width 8.125 in. [206.38 mm] Height: 28.25 in. [717.55 mm]
Boxed Weight	8.0 lbs. [3.63 kg]
Warranty	2 years limited
Part Numbers	011201

Ceiling Tile Drop-In Auxiliary Analog Speaker

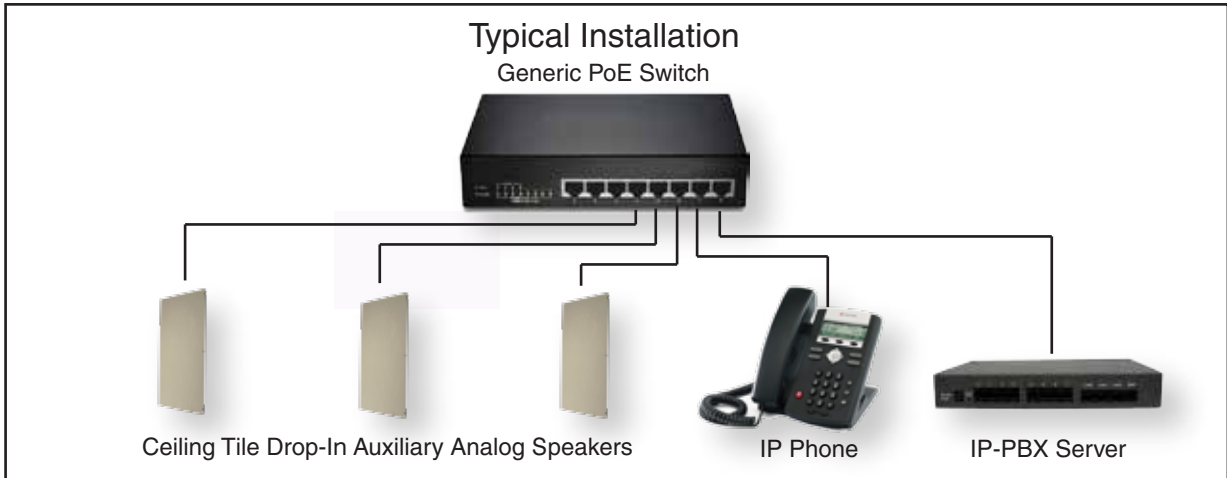

IP Speaker with Extra Speaker Connection

