

SIP Outdoor Intercom with Keypad

The SIP Outdoor Intercom with Keypad delivers two-way communication and secure access control for your VoIP phone system. These devices are perfect for settings such as commercial/residential facilities, schools and universities, retail establishments, warehouse and manufacturing plants, SMB, parking garages and shipyards and so much more.

CyberData has maintained one of the most comprehensive list of IP PBX servers certified to work with CyberData VoIP Products.



Features

- TLS 1.2, Enhanced security for IP Endpoints in a local or cloud based environment
- Relay configurable for secure access in all modes
- Security mode allows for up to 500 user codes with configurable times and blacklisting plus extension dialing
- Phone mode allows use as a hands-free phone
- Enhanced acoustic echo canceler
- 12-key keypad with backlight
- Programmable speed dial
- Full-duplex voice operation
- Supports SRST (Survivable Remote Site Telephony) in a Cisco environment
- Streamlined case design
- Network web management and firmware download
- Network adjustable speaker volume
- Concurrent SIP and multicast paging
- Dry relay contact for auxiliary control
- Door closure and tamper alert signal
- Downloadable alert, ringtones and callout

Specifications

| | |
|---------------------|--|
| Ethernet I/F | 10/100 Mbps |
| Protocol | SIP RFC 3261 Compatible |
| Power Input | PoE 802.3af compliant or +8 to +12VDC @ 1000mA Regulated Power Supply (not included) |
| Speaker Output | 2 Watts Peak Power |
| On-Board Relay | 1A @ 30 VDC |
| Payload Types | G.711 a-law, G.711μ-law, G.722, and G.729 |
| Network Security | TLS/SSL 1.2 |
| IP Rating | IP65 |
| Operating Range | Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing |
| Storage Temperature | Temperature: -40° C to 70° C (-40° F to 158° F) |
| Storage Altitude | Up to 15,000 ft. (4573 m) |
| Dimensions* | 7.480 inch [190 mm] Length 2.284 inch [58 mm] Width 5.118 inch [130 mm] Height |
| Weight | 2.8 lbs. [1.27 kg] |
| Boxed Weight | 4.0 lbs. [1.81 kg] |
| Compliance | CE; EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive – EN 60950-1, RoHS Compliant, FCC; Part 15 Class A, Industry Canada; ICES-3 Class A, IEEE 802.3 Compliant |
| Warranty | 2 Years Limited |
| Part Number | 011214 |

*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.

Related Products:



011375 Network Dual Door Strike Relay



011269 Door Strike Intermediate Relay Module




011215 Outdoor Keypad Intercom Shroud



011442 Flush Mount Kit, 2x

SIP Outdoor Intercom with Keypad

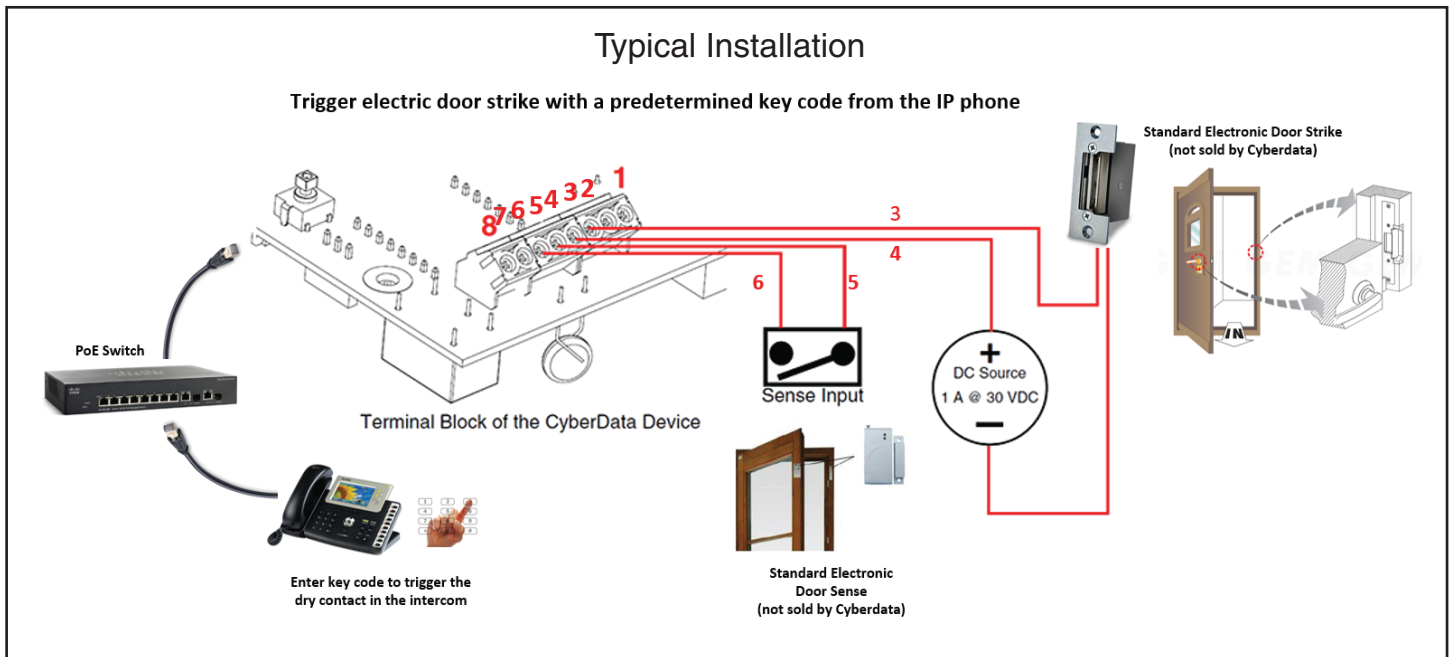

SIP Outdoor Intercom with Keypad

