

# SMARTNODE™ PRODUCT LINE OVERVIEW

From the leading manufacturer of UC, Connectivity, IoT & All-IP Solutions

## SmartNode

VoIP solutions that are  
*more than just talk*



**PATTON**<sup>®</sup>  
*Let's Connect!*<sup>™</sup>

## Contents

VoIP Starts with SmartNode .....	3
Why SmartNode™? .....	3
Patton Cloud .....	4
SmartNode Product Comparison .....	6
Virtual SmartNode .....	8
Carrier-Grade TDM + VoIP SmartMedia Gateways & SBCs .....	9
Enterprise Solutions.....	10
Legacy PBX to SIP Trunk Migration .....	10
Connecting Analog Legacy Terminals .....	11
IP PBX PSTN Gateway with Survivability.....	11
Connecting Remote Offices .....	12
Remote Office Survivability .....	12
All-IP Set-up with Enterprise Session Border Controllers.....	13
Automated SIP Survivability Solution.....	14
Carrier Solutions .....	15
Carrier CPE: Legacy PBX .....	16
Carrier CPE: Session Border Controller for SIP Normalization .....	16
Hosted PBX and On-premise IP Carrier CPE: PBX .....	17
Carrier Network .....	18
Microsoft Skype for Business .....	19
SmartNode Certifications .....	20
Enterprise Telephony Solutions .....	20
Carrier Softswitch, IMS and Cloud Solutions.....	20
Zero Touch Provisioning .....	21
Options .....	21
Benefits .....	21

### Copyright and Trademark Statement

Copyright © 2009–2020 Patton Electronics Co. All rights reserved.

Patton is a registered trademark and the terms SmartNode, SmartWare, SmartLink, Trinity, and SmartMedia are trademarks of Patton Electronics Company in the United States and other countries. All other trademarks, trade names, or company names referenced herein are used for identification only and are the property of their respective owners.

## VoIP Starts with SmartNode...

SmartNode integrates IP and TDM communications for Enterprise and Carrier access networks, offering VoIP gateways combined with IP access routing, WAN transmission, and transcoding functionality. SmartNode scales from 1 to 32,768 VoIP or fax calls with various telephony interfaces including analog FXS/FXO and digital ISDN BRI, PRI, DS3 and STM-1.

Award-winning SmartNode™ equipment delivers state-of-the-art VoIP technology that integrates seamlessly with existing analog PSTN,

digital ISDN, and IP infrastructures. SmartNode™ provide any-to-any multipath switching, and supports simultaneous SIP, H.323, ISDN and PSTN calling—plus T.38 SuperG3 FAX and modem over IP.

SmartNode's proven interoperability with all major brands of softswitches and IP PBXs makes it easy for carriers and enterprises to deploy future-proof VoIP systems quickly and profitably. As VoIP gateway pioneers since 1998, tens of thousands of SmartNode products are up and running in enterprise and carrier networks worldwide.

### Why SmartNode?

- ✓ Patton Quality and Reliability
- ✓ Industry-Best Customer Support
- ✓ Robust Enterprise Feature Sets and Functionality
- ✓ Flexible and Secure
- ✓ Proven Interoperability
- ✓ Swiss Engineered. Made in the USA.



2015, 2019 & 2020



2005, 2006, 2009, 2010,  
2012, 2015–2020




2007 & 2013



2007, 2009, 2012,  
2013 & 2015

# Patton Cloud

The Patton Cloud is a centralized portal to empower and simplify Edge Services, Hosted Telephony, SIP Trunking, Security and IoT Cloud Connectivity using the Cloud to make those services easily deployable, manageable and accessible.

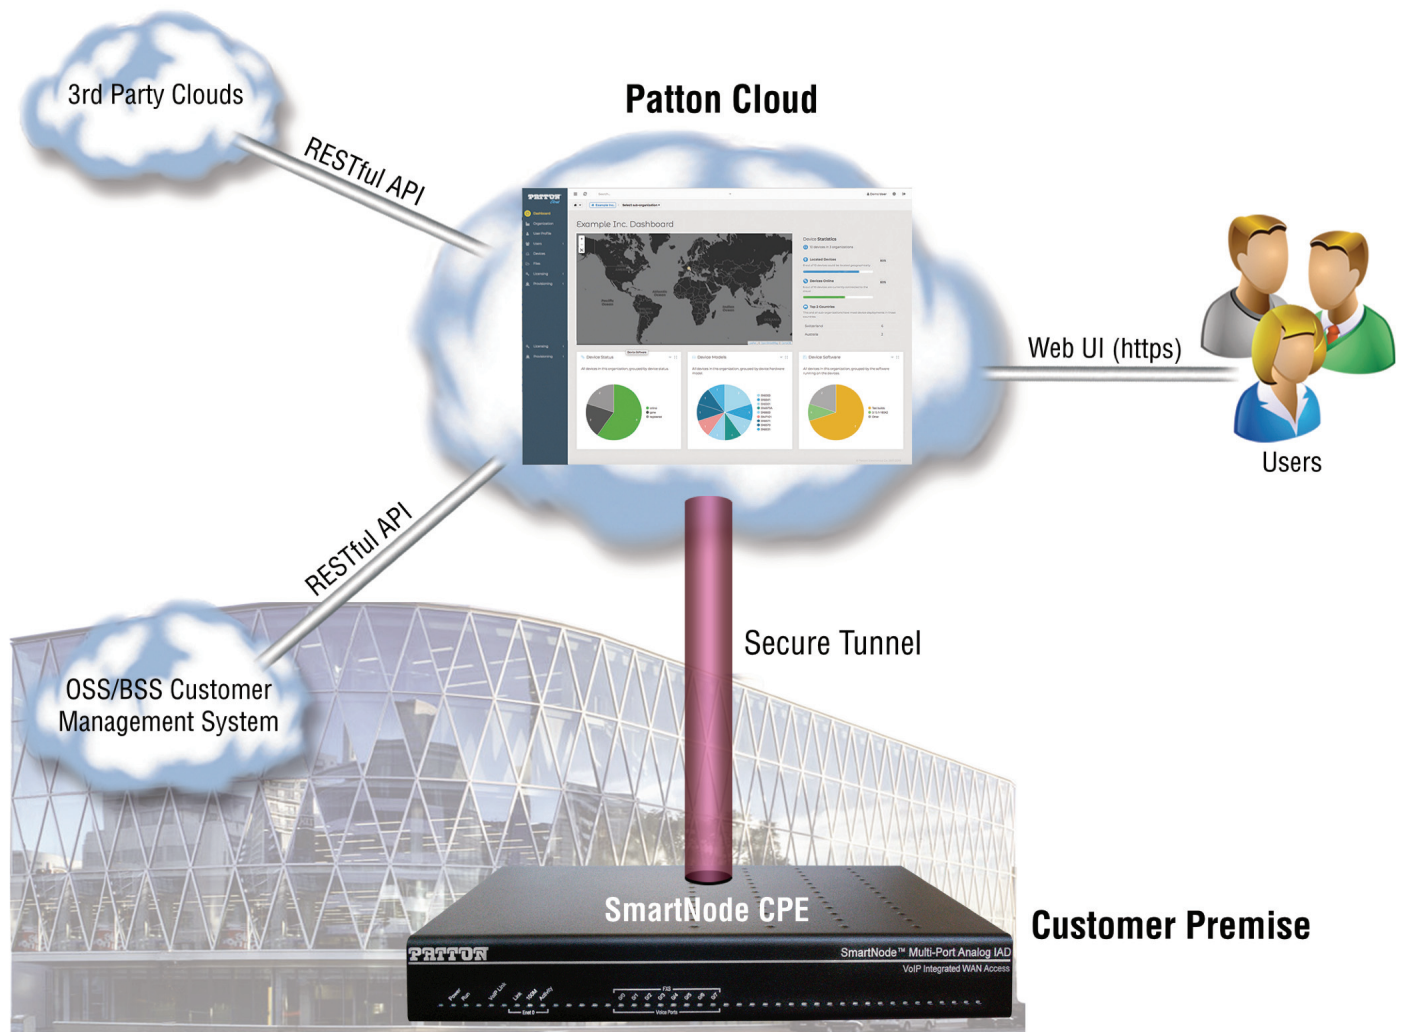

**90-Day FREE Trial!**

Request your free trial of the Patton Cloud Professional Edition at [www.patton.com/cloud/#demo](http://www.patton.com/cloud/#demo)



## Patton Cloud Benefits

 <b>CENTRALIZED</b>	 <b>SIMPLE</b>	 <b>INEXPENSIVE</b>
 <b>SECURE</b>	 <b>PROFITABLE</b>	 <b>INTEROPERABLE</b>

## Service Plans

	Basic	Standard	Advanced	Professional
Managed Devices	5	10	50	500
Basics	✓	✓	✓	✓
Redirect*	✓	✓	✓	✓
Provisioning**		✓	✓	✓
Licensing		✓	✓	✓
Files		✓	✓	✓
Basic Call Records		✓	✓	✓
File Synchronization			✓	✓
File Backup/Restore			✓	✓
Software			✓	✓
Alerts			✓	✓
Wizard Editor			✓	✓
Packet Capture			✓	✓
Call Quality Scoring			✓	✓
Advanced CDRs and Call Quality Metrics			✓	✓
LAN Device Discovery & Management			✓	✓
Multi-Tenant				✓
Support				✓
API				✓

\* For an unlimited number of devices

\*\* Launching Wizards only—Modification/creation of Wizards require Advanced or Professional plan


## Virtual SmartNode

The Virtual SmartNode provides a comprehensive feature set (as shown at right) that is required for you as an enterprise or service provider looking to virtualize your infrastructure.

### Use Case Examples


The Virtual SmartNode adapts to a variety of use cases that include:

- **eSBC**—for VoIP service demarcation functions such as network topology hiding (security), SIP normalization, Session control & routing, IPv4 to IPv6 Network translation, TCP to UDP protocol conversion.
- **VPN termination**—of VPN links from branch offices to central site
- **IP Routing**—scalable network router with NAT & NAPT, DHCPv4 & v6, RIP, BGP, VRRP, GRE and ACL functionality
- **IP Network Gateway**—IPv4 to IPv6 interoperability. WAN-LAN network separation, multi-access link management and much more.

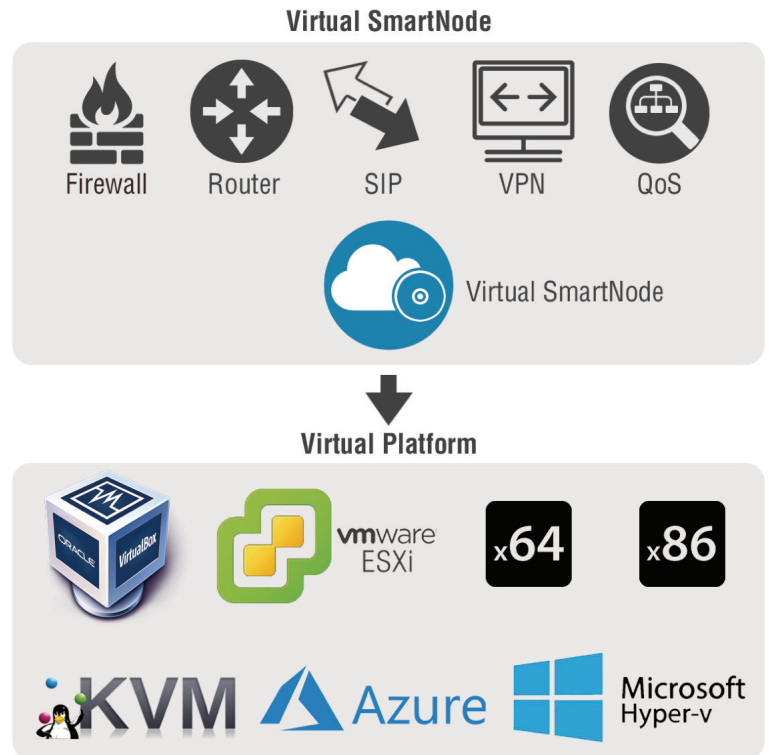

### Virtual SmartNode Application

Quickly and easily scales Virtual Networking Functions (VNF) that you need serving your clients, managed and orchestrated by using the Patton Cloud as shown below.

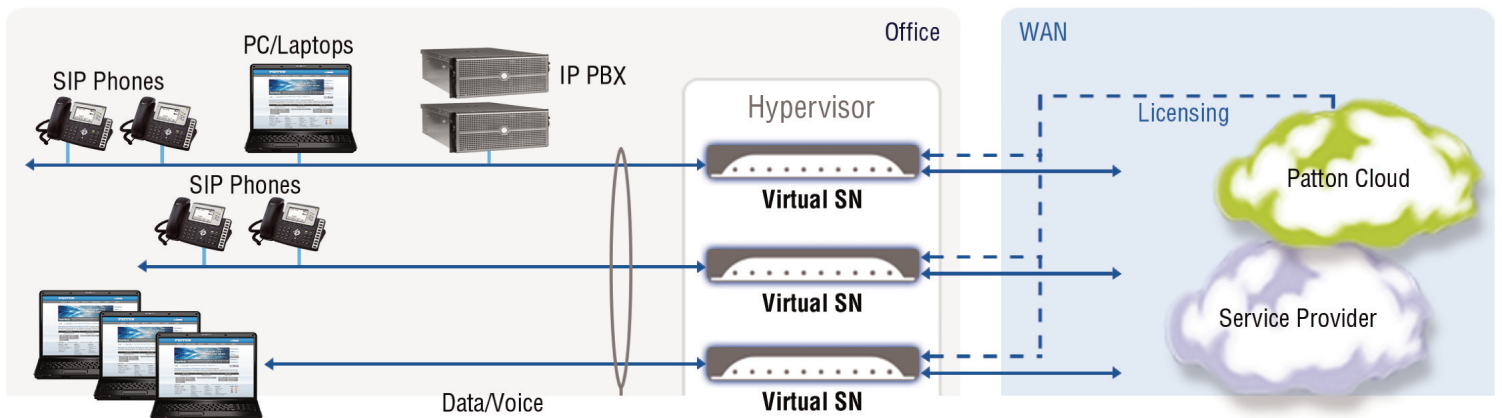






## SmartNode Product Comparison

Depending on the model, SmartNode comes with four software packages developed for different applications:





- **Trinity™**—Small/medium enterprise feature sets (including features like: Patton Cloud Connect, IPv6 Networking & SIP, TLS and SRTP, Secure Zero Touch, etc.).
- **SmartMedia™**—Large enterprise and carrier network feature sets (SIP, PSTN, Call routing, QoS, Transcoding, SS7, etc.).

For more info, see [www.patton.com/products/smartnode\\_software.asp](http://www.patton.com/products/smartnode_software.asp).











Analog Gateways			
	SN200	SN4140	SN4740
			
<b>Software</b>	Trinity	Trinity	Trinity
<b>Patton Cloud Connect</b>	Yes	Yes	Yes
<b>Telephony Interfaces</b>	FXS & FXO	FXS	FXS (FXO soon)
<b>Telephony Ports</b>	1, 2 and 4	2, 4 or 8	16, 24, 32, 48, 72, 96, or 128
<b>IP Router: IP Routing, QoS, VPN, etc.</b>	No	No	Optional
<b>Ethernet Ports</b>	1	1 or 2	2
<b>WAN Access</b>	No	No	No

ISDN BRI Gateways		
	SN4130	SN4150
		
<b>Software</b>	Trinity	Trinity
<b>Patton Cloud Connect</b>	Yes	Yes
<b>Telephony Interfaces</b>	BRI	BRI, FXS, FXO
<b>Telephony Ports</b>	2, 4 or 8	2, 4 or 8
<b>VoIP Channels</b>	4, 8, 16	4, 8 or 16
<b>IP Router: IP Routing, QoS, VPN, etc.</b>	No	No
<b>Ethernet Ports</b>	1 or 2	1 or 2
<b>WAN Access</b>	No	No

## T1/E1/PRI Gateways

	SN4170	SN4970	SN4980	SN4990
				
<b>Software</b>	Trinity	Trinity	Trinity	Trinity
<b>Patton Cloud Connect</b>	Yes	Yes	Yes	Yes
<b>Telephony Interfaces</b>	PRI	T1/E1/PRI	T1/E1/PRI	T1/E1/PRI
<b>Telephony Ports</b>	1 or 2	1 or 4	1 or 4	1 or 4
<b>VoIP Channels</b>	15 to 30	15, 24, 30, 48, 60, 96 or 120	15, 24, 30, 48, 60, 96 or 120	15, 24, 30, 48, 60, 96 or 120
<b>VoIP Gateway: Converts TDM to IP</b>	Yes	Yes	Yes	Yes
<b>IP Router: IP Routing, QoS, VPN, etc.</b>	No	No	Yes	Yes
<b>Ethernet Ports</b>	1 or 2	1	2	2
<b>WAN Access</b>	No	No	No	Fiber, ADSL, G.SHDSL, VDSL
<b>Transcoding: Interconnect multiple VoIP networks</b>	No	No	Optional	Optional


## Enterprise Session Border Controllers (eSBC)

	SN500	SN5300	SN5480	SN5490	SN5500	SN5530	SN5540	SN5550	SN5570	SN5600
										
<b>Software</b>	Trinity	Trinity	Trinity	Trinity	Trinity	Trinity	Trinity	Trinity	Trinity	Trinity
<b>Patton Cloud Connect</b>	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
<b>Telephony Interfaces</b>	N/A	None	None	None	None	2, 4 or 8 BRI	2, 4 or 8 FXS, FXO	2 or 4 BRI, FXS, FXO	1 or 2 PRI	None
<b>SIP Sessions</b>	4 to 30	Up to 60	Up to 80	Up to 80	Up to 200	Up to 200	Up to 200	Up to 200	Up to 200	Up to 1000
<b>Transcoded Calls</b>	N/A	N/A	Up to 64	Up to 64	Up to 16	2, 4 or 8	2 or 4	2 or 4	16	N/A
<b>Transcoding: Interconnect multiple VoIP networks</b>	N/A	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
<b>VoIP Gateway: Converts TDM to IP</b>	No	No	No	No	No	Yes	Yes	Yes	Yes	No
<b>IP Router: IP Routing, QoS, VPN, etc.</b>	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
<b>Ethernet Ports</b>	2	4	2	2	2	2	2	2	2	2
<b>WAN Access</b>	N/A	G.SHDSL.bis (ATM or EFM)	No	Fiber, G.SHDSL, VDSL/ADSL	Fiber, G.SHDSL, VDSL/ADSL	Fiber, G.SHDSL, VDSL/ADSL	Fiber, G.SHDSL, VDSL/ADSL	Fiber, G.SHDSL, VDSL/ADSL	Fiber, G.SHDSL, VDSL/ADSL	Ethernet
<b>SIP &amp; RTP Security</b>	Yes*	Yes*	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes*

\* SIP TLS



# Carrier-Grade TDM + VoIP SmartMedia Gateways & SBCs

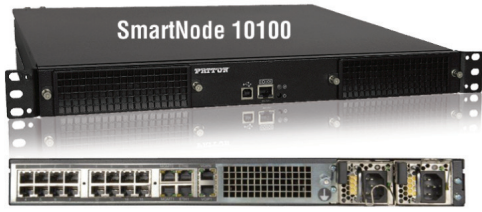

4-16 T1/E1s



16-64 T1/E1s



1-3 DS3s



1 OC3/STM-1

Up to  
1,024 T1/E1s

Up to  
48 DS3s

Up to  
16 OC3/STM-1s



Connect your SS7 edge, core and peer zones with emerging H.248 and SIP networks. By supporting TDM-to-TDM, TDM-to-IP, and IP-to-IP architectures, the SmartNode 10K supports your Converged IP migration plan.

- SS7 Media & Signaling
- 1+1 & N+1 Redundancy
- Up to 48 Ethernet Ports
- Scriptable Call Routing

## Carrier Gateways & SBCs

	SN10100	SN10200	SN10300	SN10500
<b>Software</b>	SmartMedia	SmartMedia	SmartMedia	SmartMedia
<b>Application</b>	Gateway	Gateway	Gateway	SBC
<b>Telephony Interfaces</b>	T1/E1/PRI	T1/E1/PRI DS3 STM-1	T1/E1/PRI DS3 STM-1	None
<b>Telephony Ports</b>	4 to 8	16 to 64 1, 2, or 3 1	16 to 1024 1, 2, or 3 1 to 15 +1	Optional 16 E1/T1s
<b>VoIP Channels</b>	up to 256	up to 2,048	up to 32,768	25 to 5000 (SIP to SIP)
<b>VoIP Gateway: Converts TDM to IP</b>	Yes	Yes	Yes	Optional
<b>IP Router: IP Routing, QoS, VPN, etc.</b>	No	No	No	No
<b>Ethernet Ports</b>	2	2	up to 48	4 to 6
<b>WAN Access</b>	No	No	No	No
<b>Transcoding: Interconnect multiple VoIP networks</b>	No	No	No	up to 2,744

# Enterprise Solutions

## Legacy PBX to SIP Trunk Migration

### *Solution Gateway*


By installing a PRI SmartNode, it allows an enterprise connecting their PBX to a SIP Trunk service which helps to cut telephony costs significantly.



### *Solution Gateway-eSBC*

As the business grows and starts investing in next-generation IP telephones while at the same time utilizing the perfectly good analog/digital phone equipment the same SmartNode providing any-to-


any flexible call routing between legacy PBX, IP PBX, PSTN and SIP trunks.

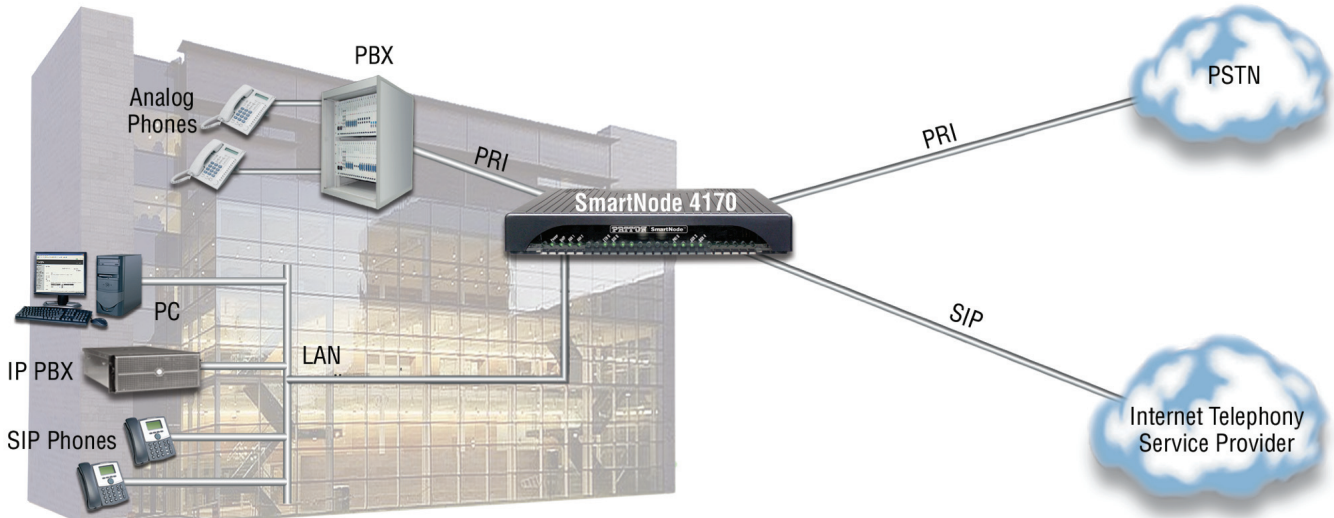

### Connecting Analog Legacy Terminals

When migrating to a VoIP network, many businesses find it difficult to replace every legacy terminal with a brand new IP terminal all at once. The SmartNode Gateway gives SMBs and hotels the ability to connect this existing equipment to their IP phone system.

As the world transitions to All-IP, fax has become a particularly hot topic as it has proven to be an indispensable technology. When sending faxes over a VoIP network, even the slightest interruption in the data stream will drop a fax. Hence, to ensure reliable fax delivery, SmartNode offers T.38 and G.711 fax-over-IP.

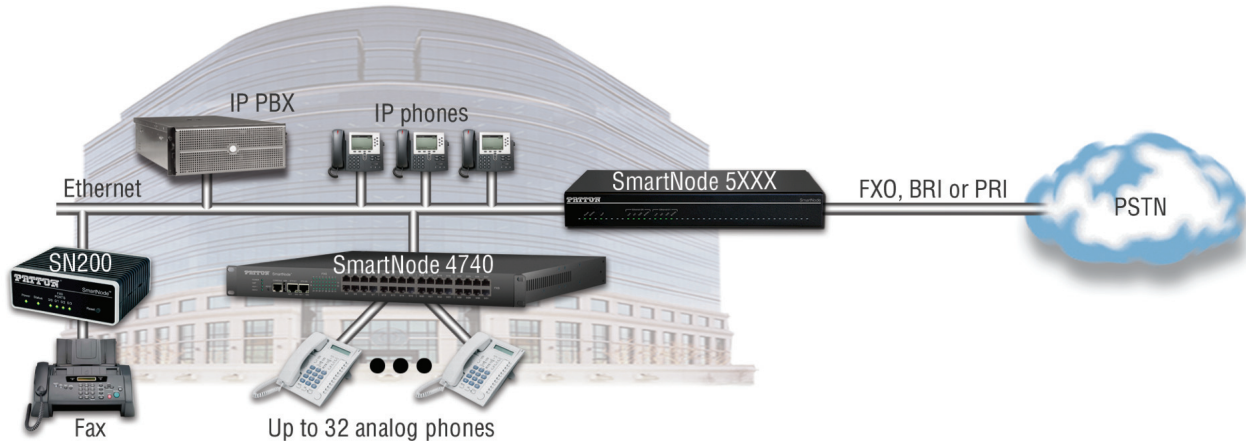

### IP PBX PSTN Gateway with Survivability

Many businesses wish to keep their existing traditional phone service provider connected to their IPPBX because they are satisfied with their current service, stuck in a contract or possibly don't trust VoIP too much yet. In these cases, offering Patton's SmartNode Gateways in conjunction with an All-IP setup enable you to provide the benefits of SIP while allowing businesses to continue using their trusted PSTN lines and existing telephony service providers.

#### Survivability – Fallback

The best VoIP providers provide 99% reliability given the necessary bandwidth requirements. A SmartNode ensures businesses telephony continuity by setting their VoIP phone network up with survivability.

A SmartNode VoIP Gateway can be used to fallback to your PSTN lines (99.999% reliability) in cases where the Internet telephony service provider or Internet connection goes down.


If the business is satisfied, you can switch them over completely to the VoIP provider and possibly keep one or two POTS lines as a fallback.



## Connecting Remote Offices

The SmartNode Gateway can be used to connect analog, ISDN and IP telephony from a remote office to your IP PBX phone system in your headquarters.


With integrated routing, QoS and VPN features, the SmartNode can ensure a secure connection and maximum voice quality between offices.

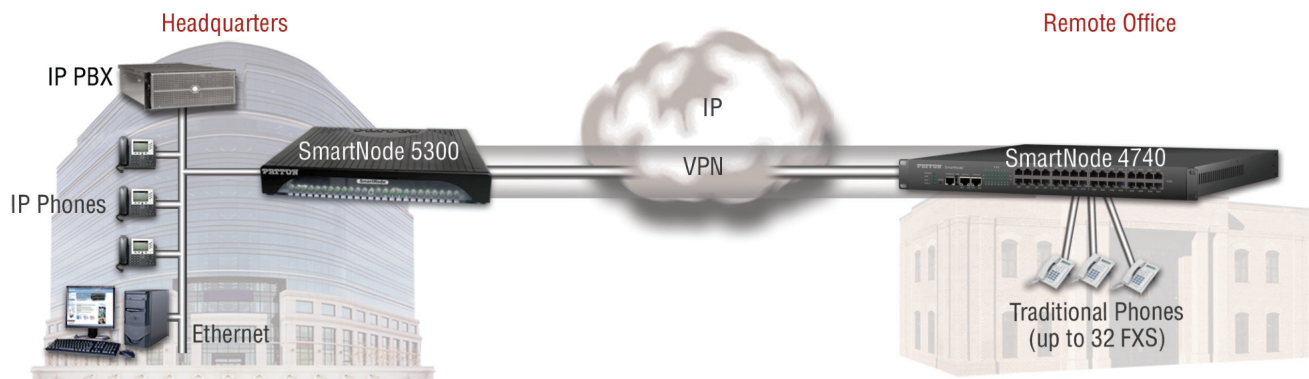

## Remote Office Survivability

A SmartNode provides a SIP Registrar for your IP phones in your remote office to register with the SmartNode directly rather than just the IP PBX in your headquarters. This way, in the case where you lose

your connection to your headquarters, the remote office can act independently making and receiving calls over PSTN lines.

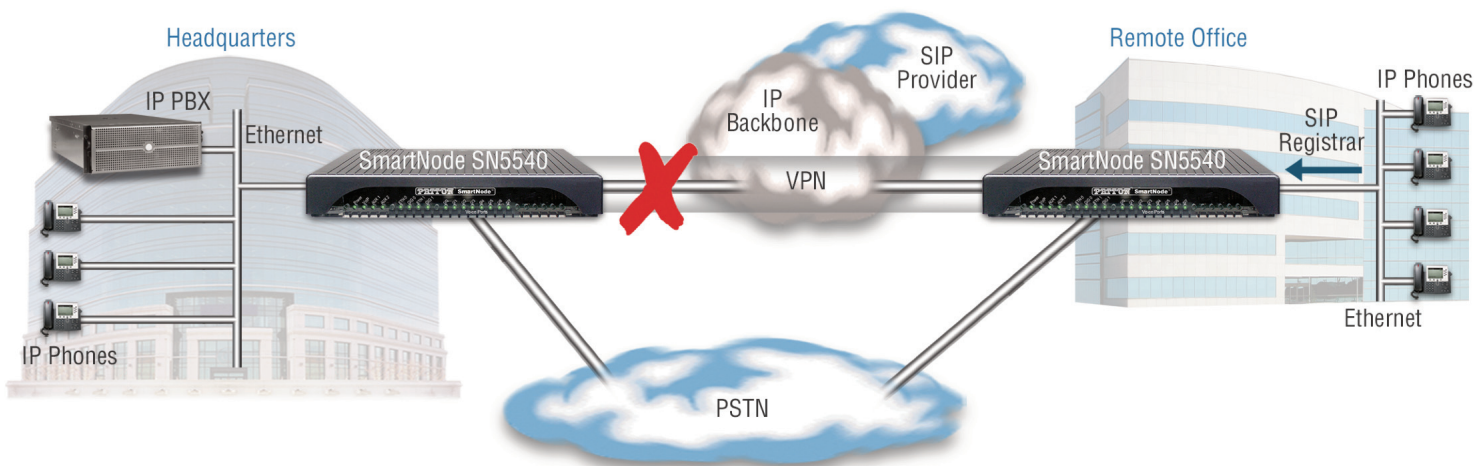



### All-IP Set-up with Enterprise Session Border Controllers

For All-IP environments, a SmartNode Enterprise Session Border Controller (eSBC) can be placed at the edge of your network to provide several key voice quality, survivability, and security features:

- **Back-to-back-user-agent (B2BUA):** Isolates your network from the outside world to hide your private addresses and network topology for security purposes.
- **SIP Automated Survivability:** Patented self-learning survivability algorithm, which learns the SIP Registration Records of the SIP endpoints. Opposed to a regular B2BUA, the SmartNode in this case acts passive during normal operation and only becomes active in case a WAN link fails.
- **Transcoding:** Provide any-to-any codec conversion allowing efficient use of bandwidth and improved voice quality. Reduce WAN-

access bandwidth requirements by converting high bandwidth G.711 codec on your LAN to low bandwidth G.729 for WAN transport. Transcoding also provides seamless integration between multiple VoIP providers using different VoIP codecs.

- **Quality-of-Service (QoS):** Ensures voice quality by managing data communications so that voice packets and other real-time data are prioritized.
- **SIP Registrar:** Enables any registration and authentication scenario between IP PBX on one side and SIP Trunk provider on the other.
- **Security:** Translates SIP and RTP to SIP/TLS and Secure RTP when traffic is leaving the LAN side of the network.

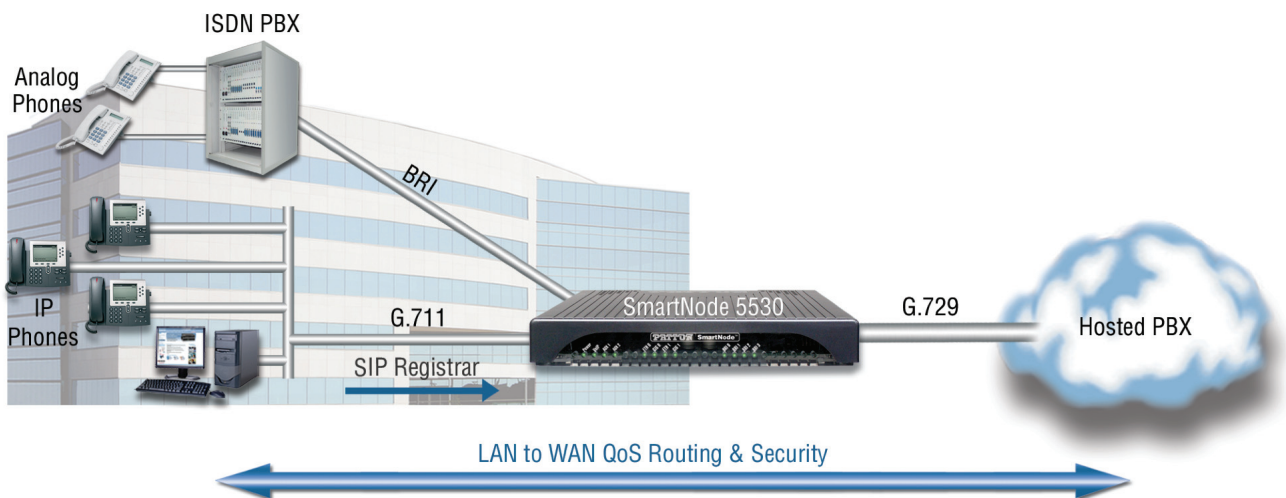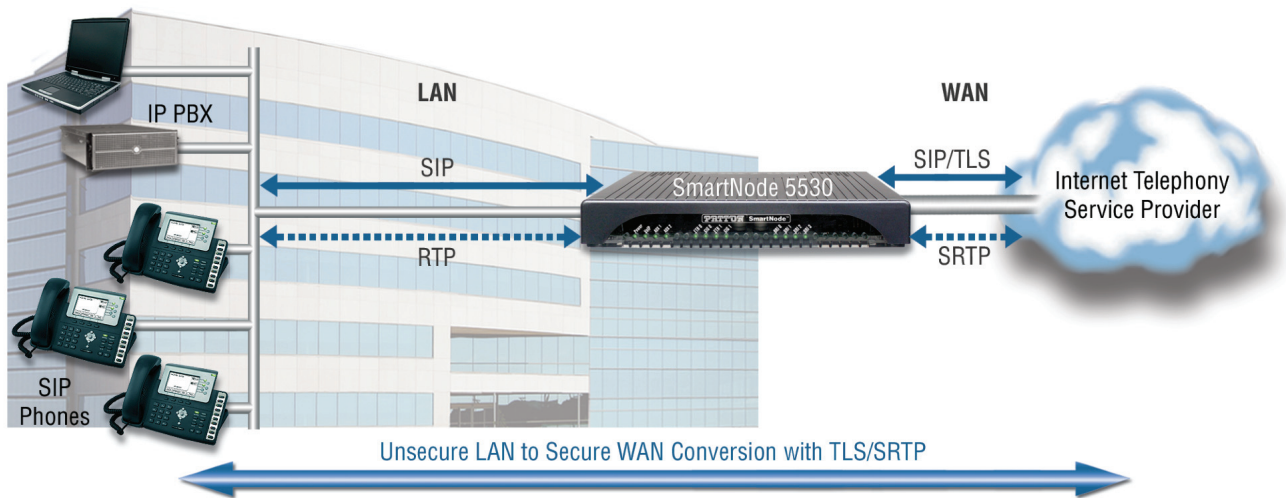


## Automated SIP Survivability Solution

Many organizations that chose to move forward with adopting an All-IP communications system will demand a comprehensive and innovative solution for the survivability problem. Patton's patented self-learning survivability algorithm—embedded in customer-

premise SmartNode enterprise session border controllers (eSBC)—combines intelligent self-learning capability with automated monitoring, switching and notification mechanisms.

### Normal operation

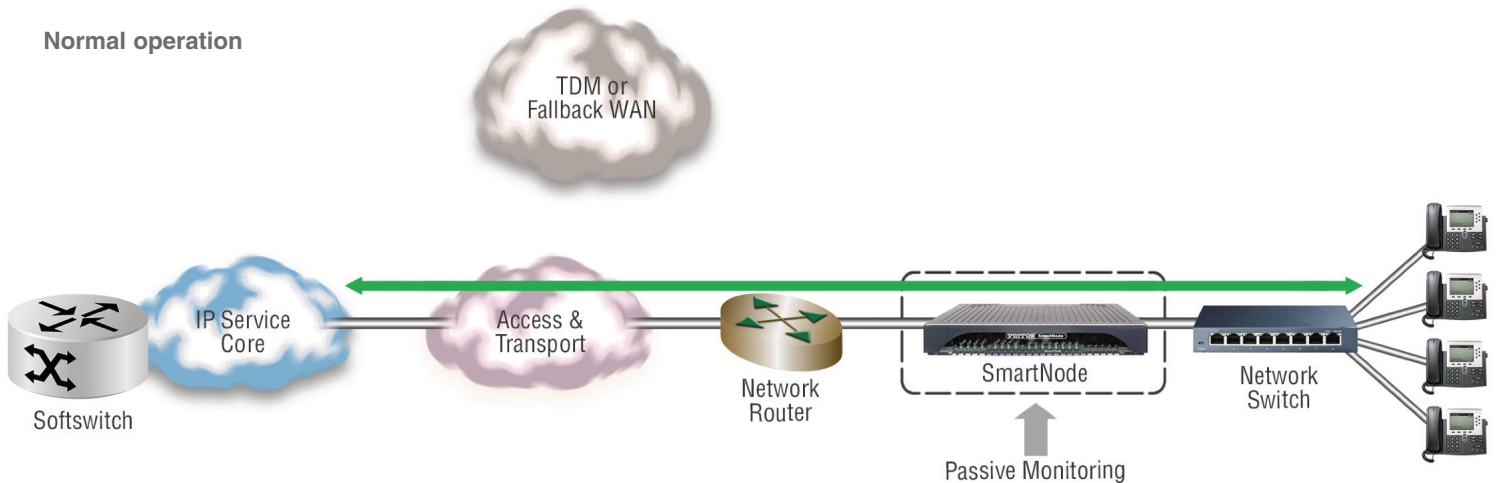

### Normal operation

The intelligent CPE engages in discovery operations to learn and record the fully qualified domain name (FQDN) of SIP servers residing in the provider networks (see image above). Further, the eSBC discovers and records the FQDN of each local IP endpoint (hardware SIP phones, IP softphones) located within the subscriber LAN environment.


The CPE then monitors the up/down state of SIP servers. If no response is received from a server, a WAN failure is indicated, and link switchover is initiated.

### Survivable state

Upon detection of a WAN failure, the CPE becomes the SIP server providing the necessary features allowing local station to station calls, emergency calls (e.g. 112 / 911) as well as regular calls, by rerouting them in to the PSTN or over an alternate WAN link being wired or wireless (see image below).

During this state the CPE is always checking if the WAN link is up again. Once back up, things revert back to normal operation.

### Survivable operation

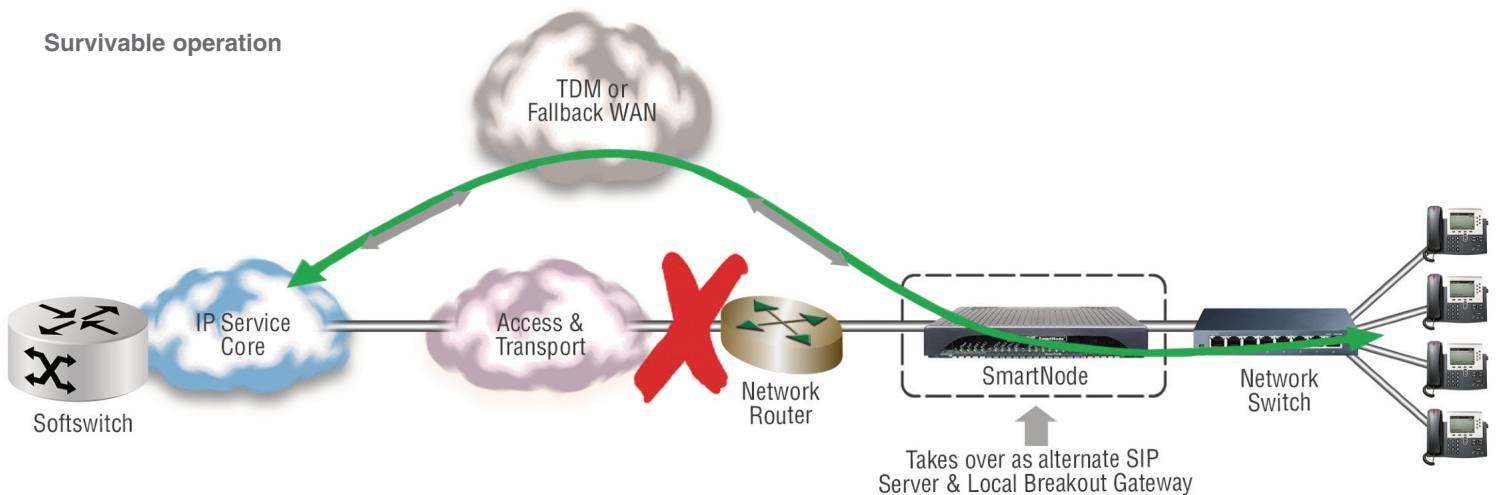


# Carrier Solutions


The Patton SmartNode™ product line supports IP PBX and hosted PBX, as well as legacy PBX systems. The feature-rich capabilities of the Patton SmartNode VoIP CPE means the service provider can have a single vendor solution that supports all VoIP services to the

end user. By providing a single and consistent SIP interface for all three of the above services, Patton can help you simplify VoIP deployment while controlling your OAM costs.



## Customer 1: ISDN Ntba replacement

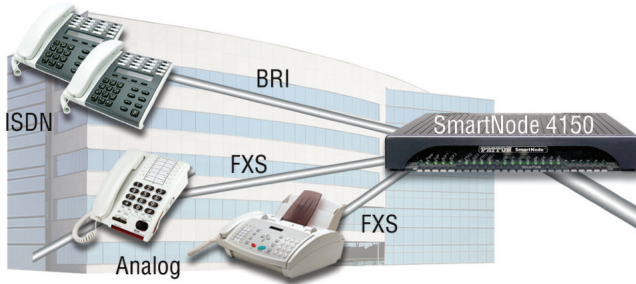

## Customer 2: On-premise IP PBX

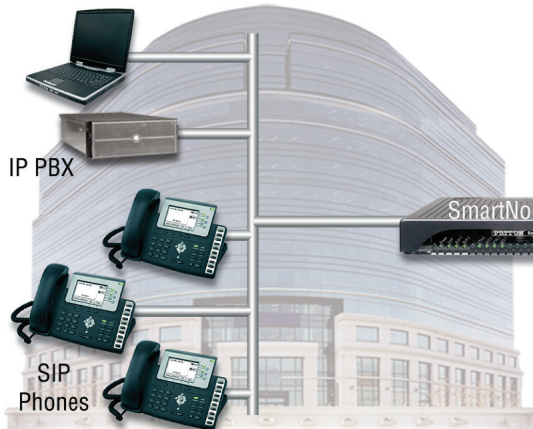

## Customer 3: Hosted All-IP solution

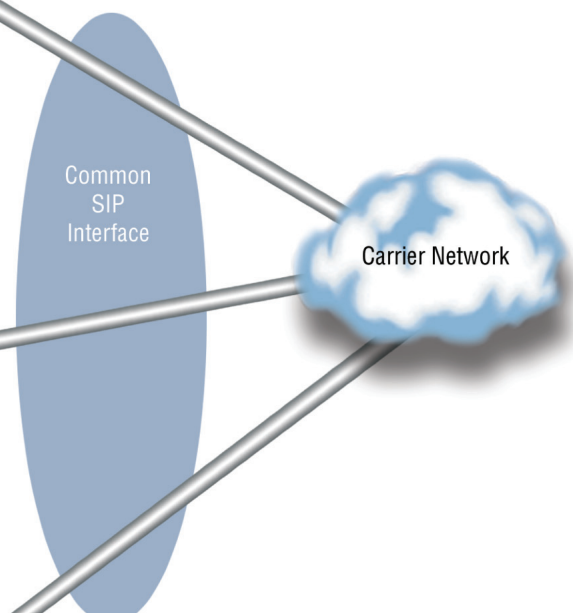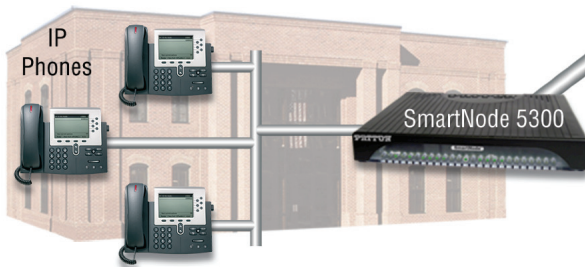


The Patton SmartNode™ solution operates under a single software platform allowing ease of installation and configuration, regardless of

the application being supported. And the specific features explained above are available on all SmartNode products.

## Carrier CPE: Legacy PBX

As a growing number of Service Providers are offering VoIP services, they face the challenge of connecting a wide array of legacy PBX systems. The SmartNode will always provide the same SIP to the service provider regardless of the type of legacy PBX attached to it.

Patton's SmartNode supports all varieties of legacy PBXs, regardless of the type of trunk supported. This includes Analog, BRI, PRI, DS3 or STM-1 connections.

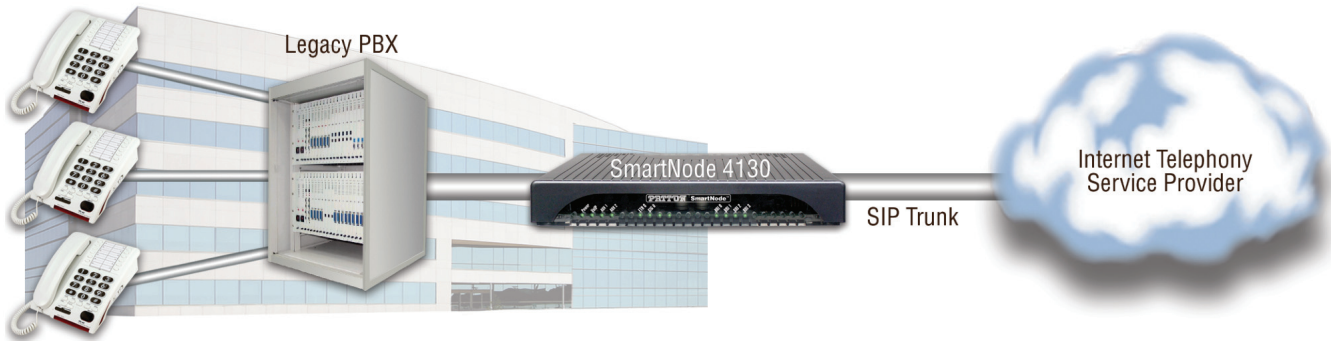


## Carrier CPE: Session Border Controller for SIP Normalization

The major problem for carriers is the wide selection of IP PBXs available on the market today. Even though each IP PBX provider claims to be SIP standards based, each system does something different with the SIP protocol. This means the service provider must have a unique softswitch profile for each type of IP PBX system that ties directly to OAM (operations, administration and maintenance) costs.

This SIP normalization standardizes setup because no matter what vendor IP PBX is used at the customer premise, the SIP presented to the service provider is always the same—eliminating the need for individual service profiles for each vendor's IP PBX.

This device receives SIP requests from the customer premise equipment and reformats the SIP to meet the requirements for the service provider softswitch.

Also moving the typical SBC features of these VoIP Routers from the Carrier network to the customer premise provides the customer with QoS, transcoding and a security demarcation point.

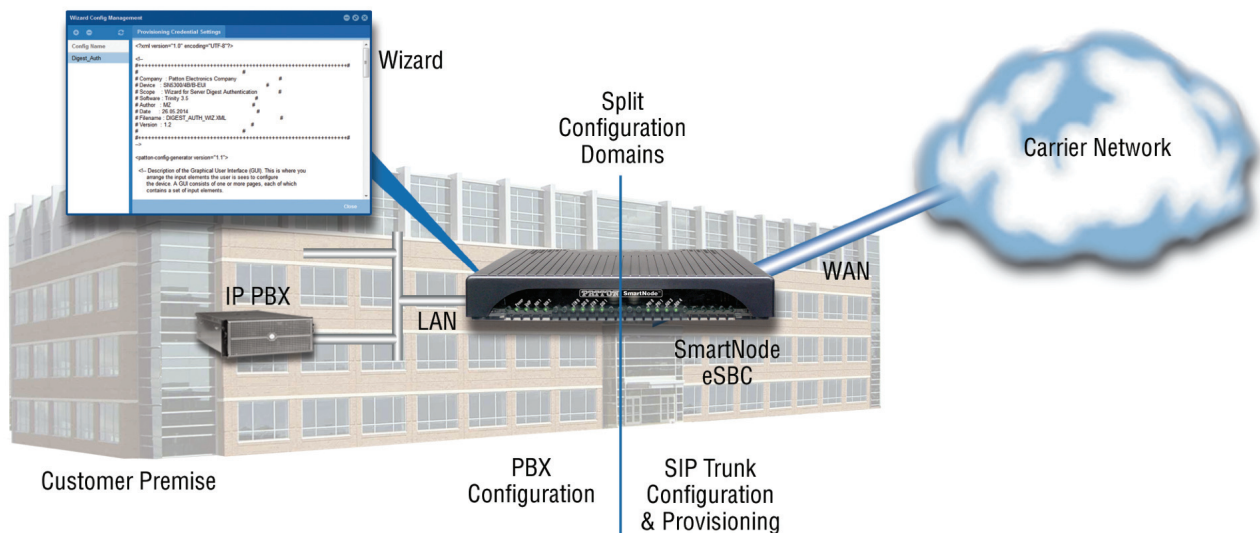

\*Any provisioning solution supporting tftp, http or https will work with the Patton SmartNode.




### Hosted PBX and On-premise IP Carrier CPE: PBX

With the wide variety of SIP phones available on the market today, the same number of softswitch SIP profiles is required to support each vendor's SIP phone. By utilizing the SmartNode Enterprise Session Border Controller with the SIP Back-to-Back user agent, a single softswitch profile can be used to support all varieties of SIP phones. This will allow control of OAM costs by not utilizing support personnel's valuable time to develop and implement multiple SIP phone profiles.

A second problem is that most SIP phones require registration to some type of softswitch or Session Border Controller to be able to


function. Most eSBCs on the market today support a SIP registrar function to allow SIP to continue operation in the case of a softswitch failure. But in the case of a broadband connection failure, the SIP phones will not be able to reach the SBC to registrar and will not function. The solution for this problem is to move that eSBC functionality to the customer premises. By complementing the SBC functionality with the SmartNode eSBC that supports SIP registration, all SIP phones will be able to operate locally without the broadband connection.

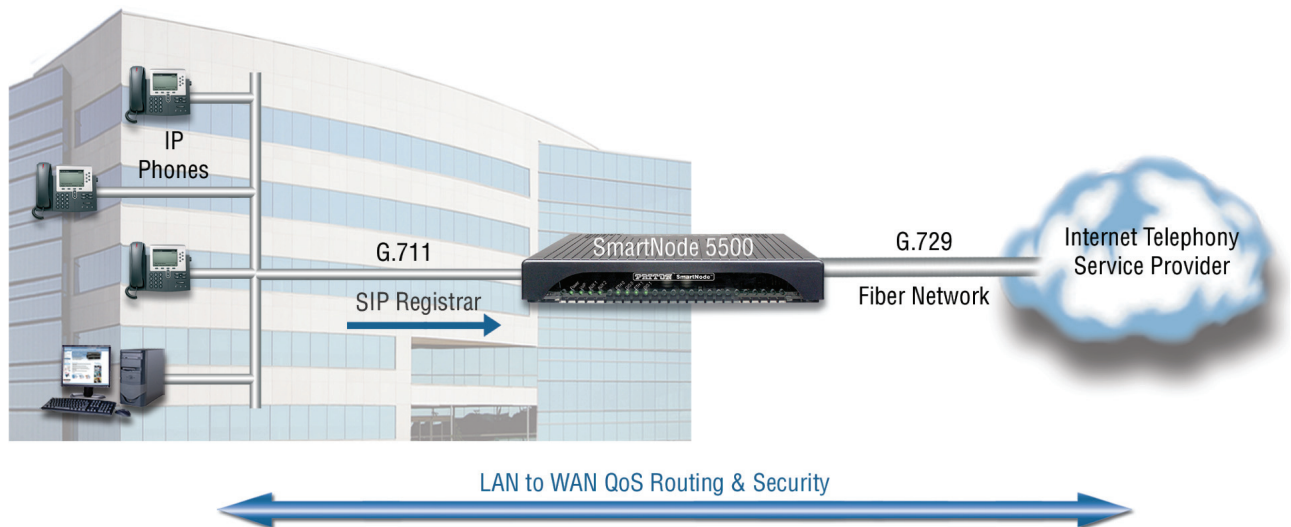

## Carrier Network

The end-of-life (EOL) of parts used to maintain a TDM infrastructure is forcing Service Providers to replace TDM-based equipment. As a result, Service Providers are migrating their networks to All-IP. This can be best accomplished using a SmartNode 10XXX Series media gateway that enables the delivery of VoIP services by bridging voice traffic between the public switched telephone network (PSTN)—

based on time-division multiplexing (TDM)—and IP networks such as the Internet. Whether sitting at the network core or at the edge, SmartNode media gateways enable service providers to introduce VoIP into their networks while maintaining the quality and the reliability of traditional TDM networks.

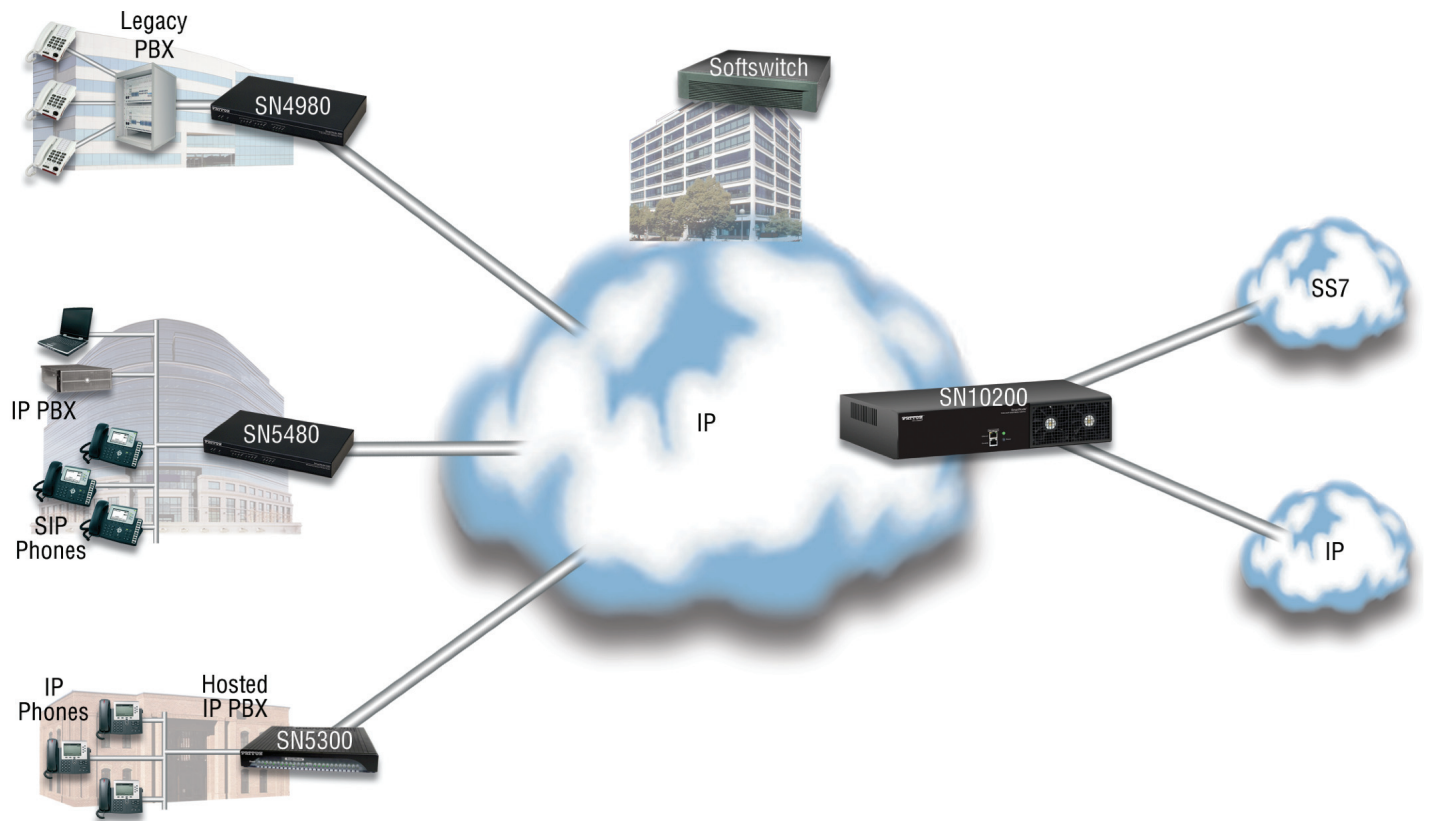




## Microsoft Teams Certified For Direct Routing

Patton SmartNode devices unify traditional telephony and SIP-based All-IP systems with MS Teams Phone System using Direct Routing. Enterprises can benefit from numerous advantages by choosing Patton SmartNode SBC and hybrid SBC.

### Features Overview

- Direct Routing Certified
- System and technology convergence
- Legacy Equipment Integration (BRI, E1/T1, Analog)
- PSTN Integration (BRI, E1/T1, FXO)
- Call Distribution, Forking
- Simultaneous Ringing, Ring-Groups
- Survivability & Failover
- Call Quality Monitoring & Alerting
- SIP Security, Network Topology Hiding
- Patton Cloud Orchestrated & Monitored
  - Floating Software Feature Licensing
  - Remote Troubleshooting
  - Call Quality Monitoring

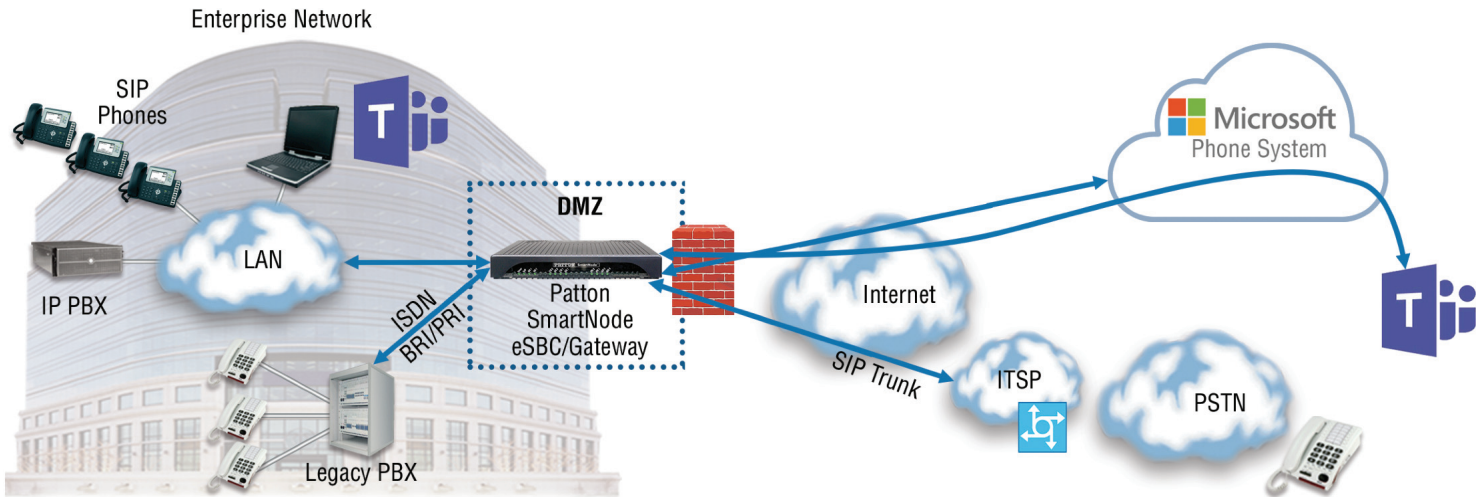

## SmartNode Certifications

Patton's interop certification program includes all the major technology brands.

### Enterprise Telephony Solutions



### Carrier Softswitch, IMS and Cloud Solutions




...and more! Check our partners page for more info at [www.patton.com/partners/](http://www.patton.com/partners/)

# Zero Touch Provisioning

Minimize your OpEx: CPE installation in less than 5 minutes!

*Standard on all SmartNode products\**

The Patton Zero-Touch Provisioning solution enables remote provisioning of SIP-trunk subscribers—avoiding the dreaded and costly truck roll. The solution ensures interoperability with just about any IP PBX (legacy or ALL-IP) or unified communications platform on the market, through the [Patton Cloud](#).

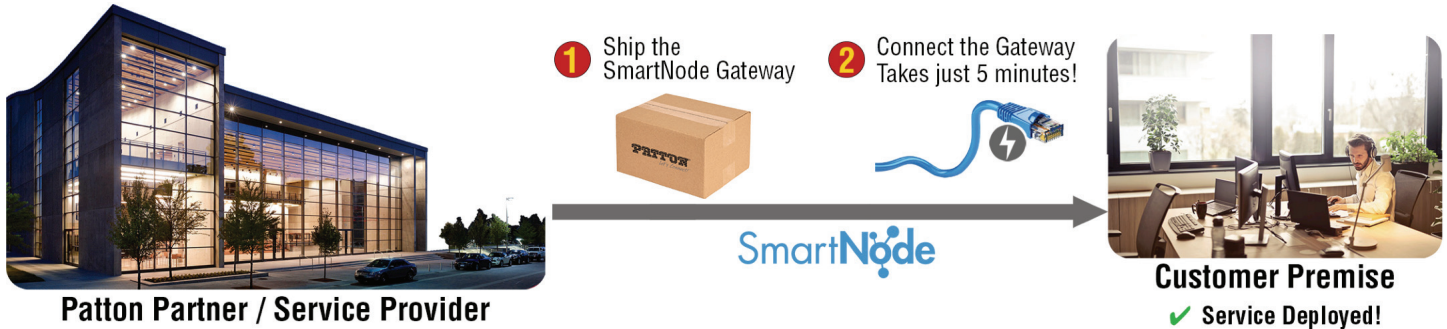

## Options


At least two options are available for carrying out the Zero-Touch provisioning feature included with the Patton Cloud Service.

In addition, Patton offers custom provisioning solutions for large-scale deployments.

### Option 2: Patton Cloud based zero touch provisioning



### Option 1: Zero Touch with external provisioning server

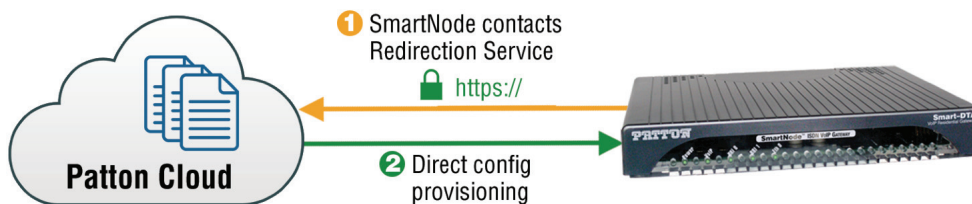

## Benefits

- **Cost-savings:** streamlined service provisioning and subscriber turn-up with no truck roll
- Assured **service quality**
- Ensured **interoperability** of network elements from multiple vendors
- Easy, streamlined **CPE management** from the [Patton Cloud](#)

\* not including SN10xxx products





**www.patton.com**

**Patton Electronics Co.**

7622 Rickenbacker Drive  
Gaithersburg, Maryland 20879  
USA

Phone **+1 301 975 1000**  
Fax **+1 301 869 9293**  
E-mail **sales@patton.com**

**Patton-Inalp Networks AG**

Meriedweg 7  
CH-3172 Niederwangen  
Switzerland

Phone **+41 (31) 985 25 25**  
Fax **+41 (31) 985 25 26**  
E-mail **we@patton.com**

**Patton Hungary Zrt**

Gábor Dénes utca 4.  
Infopark Building C, Budapest H-1117  
Hungary

Phone **+36 1 439 4840**  
Fax **+36 1 439 4844**  
E-mail **ce@patton.com**



**PATTON**<sup>®</sup>  
*Let's Connect!*<sup>™</sup>