








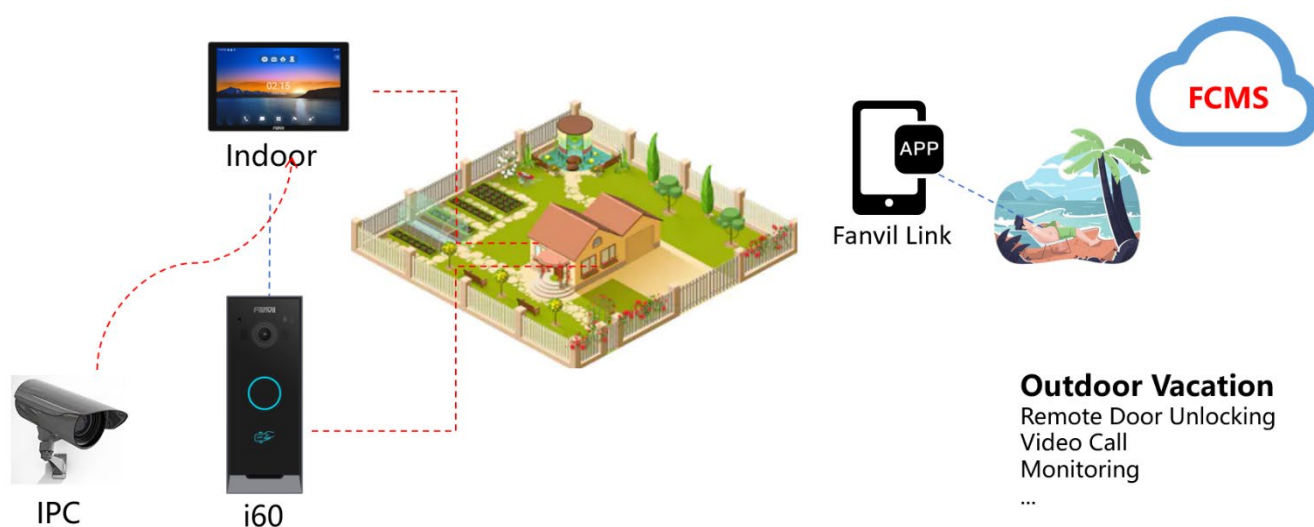
Fanvil i60 Video Door Phone

Description

Fanvil i60 is a compact video door phone with a speed dial button and an IP65 rating for indoor and outdoor use. It supports various door-opening methods such as mobile App, BLE, IC cards and DTMF code for streamlined access management and is equipped with a 2 mega-pixel camera for audio and video communication. Compatible with SIP and ONVIF, it integrates with security systems and is ideal for villas, apartments, and communities.

Main Features

- 
1 speed dial button
- 
Equipped with a 2 mega-pixel HDR high-definition camera, it provides clearer imaging
- 
IP65 high protection rating with wide temperature rate from -20°C to 60°C, suitable for harsh outdoor environments
- 
Rich interfaces for security device connectivity
- 
Support the standard ONVIF protocol, providing high flexibility and excellent compatibility



Specifications

Panel Type	Multi-apartment, Community, Villa
Keyboard	1 Speed-dial Button
Body	ABS+PC
Colors	Panel: black, Housing: Gunmetal
Sensor	1/2.9-inch, COMS
Camera	2 Mpx, Support infrared
Viewing Angle	140°(FOV) 100°(Horizontal) 57°(Vertical)
Output video	H.264 (Baseline, Main Profile)
Light Sensitivity	0.1Lux (IR Supplement Light)
Card Storage	1,0000
Power Consumption	PoE:1.63~6.93W Adapter: 1.51~6.16W
Power Supply	DC 12V / 1A PoE 802.3af Class 3
Working Temperature	-40°C~+70°C
Storage temperature	-40°C~+70°C
Size of the Panel (LWH) (LWH)	50*130*30mm
IP / IK Level	IP65
Installation	Wall-mounted Rain cover

Functional Capabilities

Supported Protocols	SIP 2.0 over UDP/TCP/TLS
Lock Opening	DTMF, IC Card, Remote Door Opening, BLE, Indoor Switches
Interface	Wiegand Input/Output Short Circuit Input/Output
Supported Wiegand Types	26, 34 bit
Supported ONVIF Types	Profile S
Supported Standards	DTMF, IC Card, Indoor Switch, BLE Cards 13.56 MHz
Talking Mode	Full duplex (High-definition Audio)
Additionally	Built-in relay, Motion detection, Tamper Alarm, TF Card, Open API