



# NetVanta 3430

## Product Features

- Modular access router supporting up to two T1s
- **RapidRoute™** technology for greater performance
- Voice Quality Monitoring (VQM) and Mean Opinion Score (MOS) prediction
- Inherent URL filtering
- Standards-based routing/switching protocols
- Feature-rich ADTRAN® Operating System (AOS)
- IPv6 ready
- CompactFlash® slot for auto-provisioning
- Stateful inspection firewall for network security
- Optional IPSec Virtual Private Network (VPN) for secure corporate connectivity across the Internet
- Onboard hardware encryption accelerator
- Recognizable Command Line Interface (CLI) and intuitive Web-based Graphical User Interface (GUI)
- Network Address Translation (NAT)-compatible Session Initiation Protocol (SIP) Application Layer Gateway (ALG) for Voice over IP (VoIP)
- Wi-Fi® Access Controller for centralized management of NetVanta Wireless Access Points (WAPs)
- Industry-leading five-year North American warranty

## Modular Access Router

The NetVanta® 3430 is a modular access router that uses **RapidRoute** technology to deliver the high-packet throughput required for IP telephony, corporate connectivity, and Internet access. This performance-enhanced platform delivers wire-speed throughput, even with advanced services enabled like Quality of Service (QoS), NAT, firewall, and VPN.

### Modular Hardware

The NetVanta 3430 is a modular, 1U-high, rackmountable metal chassis that offers two 10/100Base-T Ethernet interfaces for WAN access LAN segmentation, DMZ, or even broadband backup. The single slot houses any of the NetVanta Series Network Interface Modules (NIMs) and Dial Backup Interface Modules (DIMs). For dial backup, an analog modem DIM or an ISDN BRI DIM is available, preventing downtime by dialing around a failed circuit to any PPP-compliant device.

### Standards Protocols

Complementing the versatile hardware, the AOS allows for the support of standards-based switching, Virtual LAN (VLAN) tagging, static and default routes, and demand routing. This enables fast, accurate network convergence using industry-standard routing protocols such as BGP, OSPF, and RIP. In addition, the AOS terminates MPLS, Frame Relay, Multilink Frame Relay, PPP, Multilink PPP, Carrier Ethernet and HDLC Wide Area Network (WAN) protocols. Multihoming is also available to provide redundant or backup WAN links to multiple ISPs, guaranteeing a wide-area connection.

### Hierarchical QoS

QoS is also supported for delay-sensitive traffic like VoIP or video. To prioritize mission-critical traffic and control network congestion, the NetVanta 3430 uses Low Latency Queuing, Weighted Fair Queuing (WFQ), Class-based WFQ, and DiffServ marking to establish the priority of IP packets routed over the WAN.

### VoIP Ready

In combination with the QoS features, a specialized SIP ALG allows SIP traffic to traverse NAT-enabled firewalls. For enterprise networks, this interoperability allows IP PBXs, phones, and other SIP-based devices to set up, tear down, and pass voice and call control messages seamlessly through the integral NAT-enabled firewall.

The NetVanta 3430 also deploys VQM to capture MOS, jitter, delay, and packet loss statistics necessary to troubleshoot VoIP calls over the WAN. This powerful, yet graphically intuitive, diagnostic tool allows for quick isolation of network issues to ensure superior call quality.

### Security

The AOS provides a powerful, high performance stateful inspection firewall that can identify and protect against common Denial of Service (DoS) attacks like TCP syn flooding, IP spoofing, ICMP redirect, ping of death, and IP reassembly problems.

In addition, the AOS is capable of providing an inherent URL-filtering package without the use of an external server. URL-filtering is another level of security that allows system administrators to restrict Internet access by permitting or denying specific URLs. This URL filtering feature also includes the ability to produce top website reports of the most frequently requested websites, allowing system administrators to modify the URL filter lists.

The NetVanta 3430 offers enhanced performance IPSec VPN throughput capabilities to allow for fast network convergence of voice and data traffic through an encrypted network. By supporting IPSec, the NetVanta 3430 is fully compatible with other IPSec VPN-equipped NetVanta products.

### Administration

The AOS offers both a CLI that mimics the widely deployed industry *de facto* standard and an intuitive Web-based GUI with step-by-step configuration wizards.



ADTRAN, Inc.

Attn: Enterprise Networks  
901 Explorer Boulevard  
Huntsville, AL 35806

P.O. Box 140000  
Huntsville, AL 35814-4000

256 963-8000  
256 963-8699 fax

**General Information**  
800 9ADTRAN  
info@adtran.com  
www.adtran.com

**Pre-Sales  
Technical Support**

800 615-1176 toll-free  
application.engineer@adtran.com  
www.adtran.com/support

**Where to Buy**

877 280-8416 toll-free  
channel.sales@adtran.com  
www.adtran.com/where2buy

**Post-Sales  
Technical Support**

888 423-8726  
support@adtran.com  
www.adtran.com/support

**ACES Installation &  
Maintenance Service**

888 874-ACES  
aces@adtran.com  
www.adtran.com/support

**International Inquiries**

256 963 8000 voice  
256 963-6300 fax  
international@adtran.com  
www.adtran.com/international

**For the regional office  
nearest you, visit:**

www.adtran.com/where2buy



TL19.1270



ADTRAN is an ISO 9001, ISO 14001,  
and a TL 9000 certified supplier.

61202820G1-8C May 2011  
Copyright © 2011 ADTRAN, Inc.  
All rights reserved.

# NetVanta 3430

## Modular Access Router

### Product Specifications

#### Physical Interface

- **NIM:** 56/64k, T1/FT1, T1/FT1 with DSX-1, Dual T1, E1/FE1, E1/FE1 with G.703, ADSL, SHDSL, and Serial
- **DIM:** Analog Modem and ISDN BRI (U and S/T)
- **LAN:** Two auto-sensing 10/100Base-T ports (RJ-45)

#### Diagnostics LEDs

- Status
- Ethernet 1
- WAN
- Ethernet 2
- DBU

#### Memory

- CompactFlash® Slot

#### Protocols

- eBGP/iBGP
- OSPF
- RIP (v1 and v2)
- PIM Sparse Mode
- Demand Routing
- Policy-based Routing
- GRE
- ATM (ADSL)
- Frame Relay
- Multilink Frame Relay
- Layer 3 Backup
- Multi-VRF CE
- PPP
- Multilink PPP
- PPPoE
- PPPoA
- IGMP v2
- RFC 1483
- HDLC
- PPP Dial Backup
- PAP and CHAP
- Multihoming
- VRRP

#### Quality of Service

- Low Latency, WFQ and Class-based WFQ
- DiffServ Packet Marking and Recognition
- Frame Relay Fragmentation
- Traffic Monitoring (NetFlow 9)

#### Voice Quality Monitoring (Optional)

- Mean Opinion Score (MOS) prediction
- Jitter, Delay and Packet Loss
- Past and Active Calls

#### Administration

- CLI
- Email Alerts (SMTP)
- Policy Statistics
- TCL Scripting
- Flash Provisioning
- Web-based GUI
- n-Command® Support
- SNMP v3
- SYSLOG Logging

#### DHCP

- Client, Server, and Relay

#### Security

##### Firewall

- Stateful Inspection Firewall
- DoS Protection
- Access Control Lists
- ALGs

##### Network Address Translation

- Basic NAT (1:1), NAT (Many:1), and Port Translation
- NAT-compatible SIP ALG

##### Secure Management

- Multi-level access control
- TACACS+
- RADIUS AAA
- SSH CLI and SSL GUI
- Port Authentication (802.1x)

##### Content Filtering

- Inherent URL filter
- Top website reports
- Integration with Websense®

##### Optional VPN

- **IPSec Tunnel Mode:** 100 Tunnels
- **Encryption:** DES, 3DES, and AES
- **Authentication Mechanisms:** XAUTH, Digital certificates, Pre-Shared Keys, and Secure ID

#### Environment

- **Operating temperature:** 0° to 50 °C (32° to 122 °F)
- **Storage temperature:** -20° to 70 °C (-4° to 158 °F)
- **Relative humidity:** Up to 95%, non-condensing

#### Physical


- **Chassis:** IU, metal chassis
- **Dimensions:** 1.72" H, 10.5" W, 5.8" D
- **Weight:** 4 lbs.
- **Auto-ranging Power:** 100–250 VAC, 50–60Hz, 25 watts

#### Agency Approvals

- CE Mark, UL & Canadian UL (CUL), IEC/EN
- RoHS

### Ordering Information

Equipment	Part #
NetVanta 3430	1202820G1
NetVanta 3430 with VPN and VQM	4200820E2
VPN and VQM Software Upgrade	1950820E2

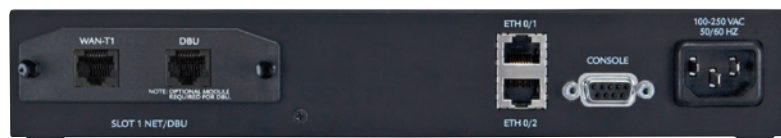

ADTRAN believes the information in this publication to be accurate as of publication date, and is not responsible for error. Specifications subject to change without notice. ADTRAN and NetVanta are registered trademarks of ADTRAN, Inc. and its affiliates in the U.S. and certain other countries. All other trademarks mentioned in this document are the property of their respective owners. Five-year warranty applies only to products sold in North America.

ADTRAN products may be subject to U.S. export controls and other trade restrictions. Any export, re-export, or transfer of the products contrary to law is prohibited. For more information regarding ADTRAN's export license, please visit [www.adtran.com/exporthicense](http://www.adtran.com/exporthicense)